

**HVAC-R
IDEAS
DESIGNED
TO SIMPLIFY
YOUR WORK**

Rodigas[®]
SRL 



1958



Since its creation in 1958, our company has been able to read and interpret changes in society, anticipating the evolution of the market and offering solutions in tune with the times. Adaptability and innovation are the keys to the success of Rodigas, which today operates worldwide thanks to the Diversitech Corporation partnership.

“
MANUFACTURING HAS BEEN THE SOUL OF OUR COMPANY FOR OVER 65 YEARS, DRIVING OUR COMMITMENT TO SIMPLIFY YOUR WORK.
”

WE TRUST IN PEOPLE AND FOR THIS REASON WE INVEST IN THEM

A COMPANY MADE UP
OF PEOPLE CANNOT
FAIL TO TAKE CARE
OF THE HEALTH
AND SAFETY OF ITS
EMPLOYEES.
IT WAS A NATURAL
STEP FOR US TO BE
CERTIFIED ISO 45001.



Health and safety
management systems


We believe that collaboration, respect and culture are fundamental values a company cannot dismiss. For this reason we are committed to invest not only in the training of our employees, but also in the creation of a cohesive and reliable work environment, which can guarantee safety and continuity in the workplace and which translates into loyalty to the company.

Crediamo che collaborazione, rispetto e cultura siano valori fondamentali dai quali un'azienda non possa prescindere. È per questa ragione che ci impegniamo a investire non soltanto nella formazione dei nostri collaboratori, ma anche nella creazione di un ambiente di lavoro affiatato e affidabile, che possa garantire sicurezza e continuità nel lavoro e che si traduca in fedeltà all'azienda.

“ ENSURING PRODUCT SAFETY AND HIGH QUALITY PRODUCTION STANDARDS ARE OUR FOCUS ”

BIM

For us at Rodigas, service is always the first and most important product we offer to our customers. That is why we are concerned about offering highly professional solutions for technical studies and designers who are more responsive to new technology solutions. This is a brilliant example of our Building Information Modeling Libraries (BIM), available to all professionals who want to include Rodigas products for conditioning, photovoltaics and fall protection in their projects.

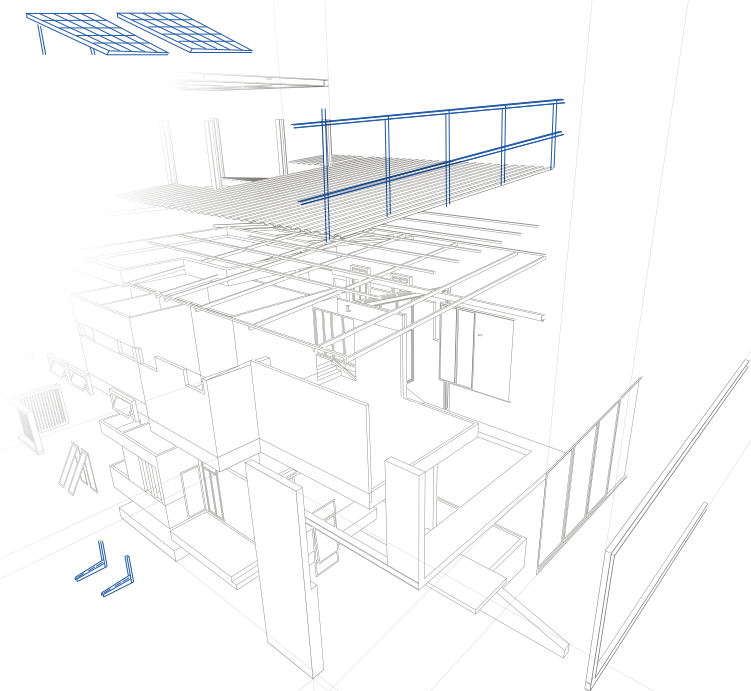

OUR CERTIFICATIONS

Certified products and processes are the best quality assurance we can offer. It is for this reason that we continuously compare ourselves with accredited institutions and professionals who guide us on our journey.



Management System
ISO 9001:2015

www.tuv.com
ID #105073334



Management System
ISO 14001:2015

www.tuv.com
ID #105073334



Management System
ISO 45001:2018

www.tuv.com
ID #105073334



Licenza 0082 del 15/12/2015



DIGITAL TECHNOLOGY IS THE ENGINE OF OUR GROWTH

THE ARTISAN ORIGIN OF RODIGAS LIVES IN THE FACES AND GESTURES OF PEOPLE WHO HAVE SET THE BASIS OF THE COMPANY

THE FOURTH INDUSTRIAL REVOLUTION

WE WORK TO IMPROVE PRODUCT QUALITY, BOOST FACTORY EFFICIENCY, STAY COMPETITIVE, ENHANCE SAFETY AND SUSTAINABILITY OF OUR PROCESSES.



Faces that are the mirror of a metalworking tradition and that, knowing how to replace the “tools of the trade” at the right time, have built the company’s future by learning to manage that technology which today allows us to operate with cutting-edge machinery and software.

QUALITY STARTING FROM EXPERT PEOPLE

Our Quality Management Team carries out rigorous inspections and testing throughout the entire production process. In this way we can ensure consistent quality in performance and products.

Il nostro team di gestione della qualità esegue rigorose ispezioni e collaudi durante tutto il processo di produzione. In questo modo possiamo garantire una qualità costante nelle prestazioni e nel prodotto.



4

persone dedicate al controllo qualità
people employed in quality control



80

ore dedicate a test e controlli ogni settimana
hours dedicated to testing and inspection every week




100%

controlli automatici in linea di produzione
automatic controls in production line

FALL PROTECTION SYSTEMS

From the experience gained in the field of renewable energy, we have developed solutions for the safety of operators working at height.



Fall protection systems and parapets are the right answer to safety on building sites and during maintenance of buildings and systems.

STRUCTURES FOR PHOTOVOLTAIC PLANTS

Our attention to the environment and to new energy sources has seen us engaged for over ten years in the photovoltaic energy sector.



We have consolidated skills regarding the design, verification and production of structures for installing photovoltaic modules.

PRODUCTION

Introduction Introduzione	04
Sliding brackets Mensole scorrevoli	16
Folding brackets Mensole pieghevoli	56
Welded brackets Mensole saldate	64
Roof brackets Mensole da tetto	84
Special brackets Mensole speciali	90
Floor supports Supporti pavimento	100

DISTRIBUTION

Vibration dampers Antivibranti	112
Condensate drainage set Scarico condensa	116
Ducts Canaline	136
Other products Altri prodotti	142
Frame Foot™ Support	152

SLIDING

SLIDING BRACKETS

- Sliding
- Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- Scorrevole
- Aggancio frontale
- Barra a muro

“

WE HAVE DESIGNED AN EASY SOLUTION FOR EASY MACHINES

”

ITALIANO

MENSOLA SCORREVOLE EASY ANONIMA

Ultima nata della famiglia Rodigas, la serie easy si posiziona sulla fascia di prodotti entry level.

Abbiamo sviluppato questo prodotto mantenendo inalterata la qualità della produzione e dei materiali, ma grazie alla peculiarità del sistema costruttivo, siamo riusciti a ridurre notevolmente la quantità di materiale utilizzato per la sua realizzazione, garantendo una portata di 120 kg sia dalla dimensione di braccio 450mm che sulla 550mm.

Questi nuovi prodotti creano una spaccatura evidente con le classiche linee Rodigas e si pongono come alternativa commerciale laddove la clientela richieda prodotti più semplici.

ENGLISH

UNBRANDED EASY SLIDING BRACKET

Easy series is the latest addition to the Rodigas Family and it is positioned on the entry level product range.

We have developed this product while maintaining the quality of production and materials. Thanks to the peculiarity of the construction system, we have managed to considerably reduce the quantity of material used in its manufacture, guaranteeing a load capacity of 120 kg on both the 450mm and 550mm arm sizes.

These new products create an evident break with the classic Rodigas branded lines and they could be a commercial alternative where customers require simpler products.

FRANÇAIS

EASY CHASSIS COULISSANT ANONYME

La série Easy est la dernière née de la famille Rodigas et se positionne dans l'entrée de gamme des produits.

Nous avons développé ce produit tout en maintenant la qualité de la production et des matériaux. Grâce à la particularité du système de construction, nous avons réussi à réduire considérablement la quantité de matériaux utilisés dans sa fabrication, garantissant ainsi une capacité de charge de 120 kg sur les bras de 450 mm et 550 mm.

Ces nouveaux produits créent une rupture avec les lignes classiques de la marque Rodigas et pourraient constituer une alternative commerciale lorsque des clients demandent des produits plus simples.

Rodigas®



MS EASY

ENTRY LEVEL SUPPORT

SLIDING BRACKETS


- ▶ Sliding
- ▶ Frontal hook
- ▶ Crossbar

MENSOLE SCORREVOLI


- ▶ Scorrevole
- ▶ Aggancio frontale
- ▶ Barra a muro




MS 630

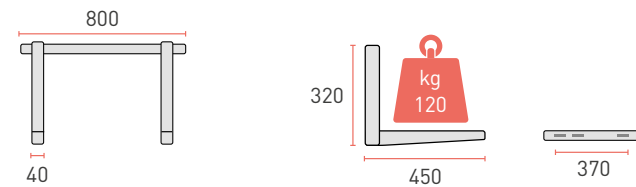


BRACKET DRILLING DIAGRAM




MS 657

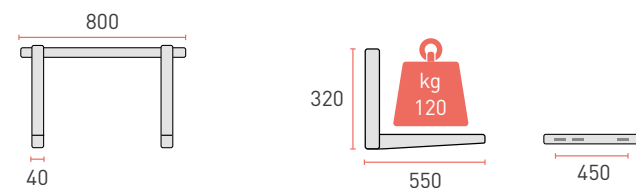


BRACKET DRILLING DIAGRAM




MS 620

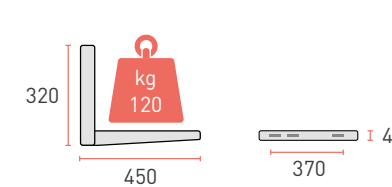


BRACKET DRILLING DIAGRAM



MS 618

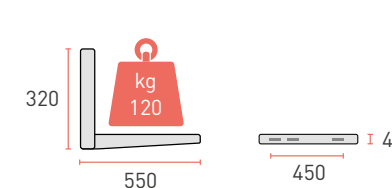

BRACKET DRILLING DIAGRAM



MATERIALS AND TREATMENT

- Materials:** electro-galvanised steel plate
- Treatment:** painting epoxy resins in polyester
- Colour:** Ral 9002
- Joint:** 2 high resistant screw M6x55 8.8
- Adjustment:** 2 adjustable gummy polypropilene feet (patented)
- Equipped with:** level to adjust the wall bar

LOAD CAPACITY

- Load capacity:** 120 kg
- Load testing weight:** 300 kg

BOX

- Pack:** carton box
- Pieces:** 1
- MS 630 / MS 657**
- Pack dimensions:** 90x95x800 mm
- MS 620 / MS 618**
- Pack dimensions:** 90x95x610 mm

PALLET

- Pallet dimensions:** 120x80x100 cm
- MS 630 / MS 657**
- Pieces per pallet:** 156
- MS 620 / MS 618**
- Pieces per pallet:** 170



OUR CERTIFICATIONS

Certified products and processes are the best quality assurance we can offer. It is for this reason that we continuously compare ourselves with accredited institutions and professionals who guide us on our journey.



MS 230

SLIDING BRACKETS

- ▶ Sliding
- Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- ▶ Scorrevole
- Aggancio frontale
- Barra a muro

MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate
Treatment: painting epoxy resins in polyester
Colour: Ral 9002
Joint: high resistant screw M6×70 8.8
Adjustment: 2 adjustable gummy polypropilene feet (patented)
Equipped with: level to adjust the wall bar, wall fixing kit, insulating washers

LOAD CAPACITY

Domestic use: 140 kg
Load testing weight: 420 kg

BOX


Pack: carton box
Pieces: 1
Pack dimensions: 90×95×800 mm
Case weight: 3.5 kg

PALLET


Pallet dimensions: 120×80×100 cm
Pieces per pallet: 117
Pallet total weight: 420 kg



DIMENSIONS AND LOADING CAPACITY

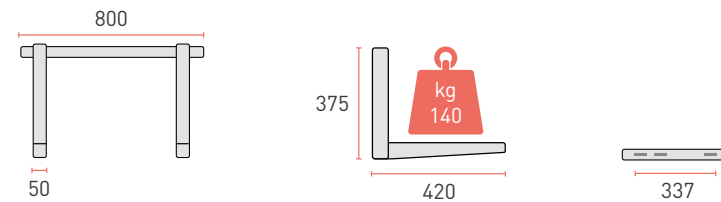

BRACKET DRILLING DIAGRAM

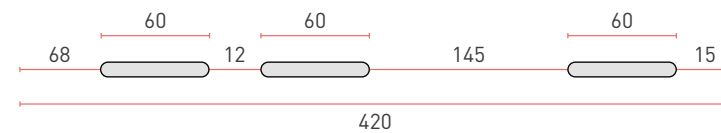

Adjustable rear foot



Insulating washers



Wall fixing kit



Levelling system



Certified quality

MS 901

SLIDING BRACKETS

- ▶ Sliding
- Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- ▶ Scorrevole
- Aggancio frontale
- Barra a muro

MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate
Treatment: painting epoxy resins in polyester
Colour: Ral 9002
Joint: high resistant screw M6×70 8.8
Adjustment: 2 adjustable gummy polypropilene feet (patented)
Equipped with: level to adjust the wall bar, wall fixing kit, insulating washers

LOAD CAPACITY

Domestic use: 100 kg
Load testing weight: 300 kg

BOX


Pack: carton box
Pieces: 1
Pack dimensions: 90×95×610 mm
Case weight: 3.5 kg

PALLET


Pallet dimensions: 120×80×100 cm
Pieces per pallet: 170
Pallet total weight: 600 kg



DIMENSIONS AND LOADING CAPACITY

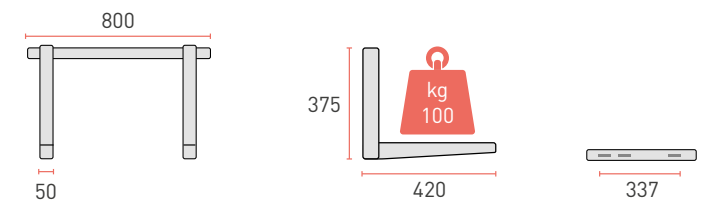

BRACKET DRILLING DIAGRAM



Adjustable rear foot



Insulating washers



Wall fixing kit



Levelling system



Certified quality



MS 242 - MS 243

SLIDING BRACKETS

- ▶ Sliding
- Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- ▶ Scorrevole
- Aggancio frontale
- Barra a muro

MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate
Treatment: painting epoxy resins in polyester
Colour: Ral 9002
Joint: high resistant screw M6×70 8.8
Adjustment: 2 adjustable gummy polypropilene feet (patented)

LOAD CAPACITY

Domestic use: 140 kg
Load testing weight: 420 kg

BOX



Pack: carton box
Pieces: 1
Pack dimensions: 90×95×800 mm
Case weight: 4.2 kg

PALLET


Pallet dimensions: 120×80×100 cm
Pieces per pallet: 117
Pallet total weight: 500 kg



DIMENSIONS AND LOADING CAPACITY

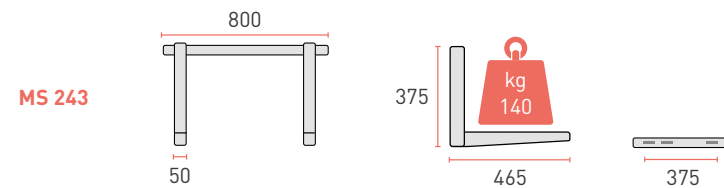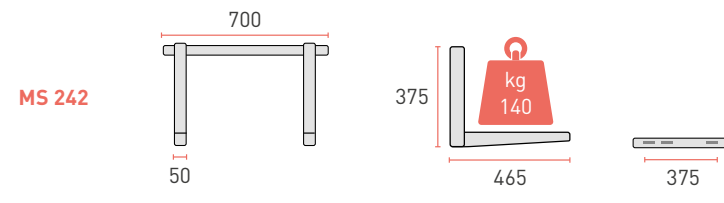

BRACKET DRILLING DIAGRAM

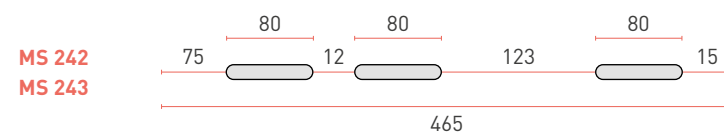

Adjustable rear foot



Wall fixing kit



Insulating washers



Pre assembled

MS 244 - MS 245

SLIDING BRACKETS

- ▶ Sliding
- Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- ▶ Scorrevole
- Aggancio frontale
- Barra a muro

MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate
Treatment: painting epoxy resins in polyester
Colour: Ral 9002
Joint: high resistant screw M6×70 8.8
Adjustment: 2 adjustable gummy polypropilene feet (patented)

LOAD CAPACITY

Domestic use: 140 kg
Load testing weight: 420 kg

BOX



Pack: carton box
Pieces: 1
Pack dimensions: 90×95×800 mm
Case weight: 4.2 kg

PALLET


Pallet dimensions: 120×80×100 cm
Pieces per pallet: 117
Pallet total weight: 500 kg



DIMENSIONS AND LOADING CAPACITY

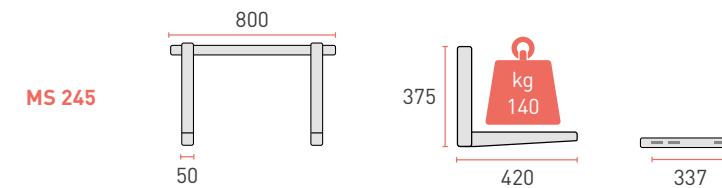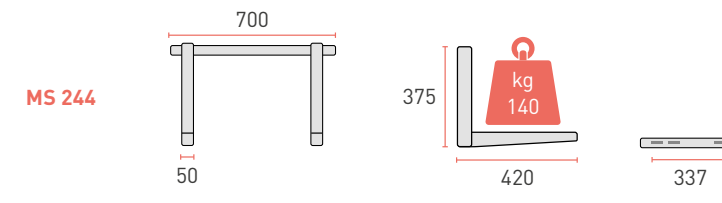

BRACKET DRILLING DIAGRAM



Adjustable rear foot



Wall fixing kit



Insulating washers



Pre assembled



Certified quality



Certified quality

“

WE ARE YOUR PARTNER FOR HVAC INSTALLATION, PHOTOVOLTAIC AND ANTI-FALL SYSTEMS

”

OUR VISION

Our experience in different sectors means that we can combine solutions from all three of our divisions: air conditioning, photovoltaic and fall protection systems.

Let's take a concrete example: in the case of replacing a conventional system with a heat pump system in a building (which is becoming increasingly common in newly constructed buildings where high energy standards are required), we can provide, among other things, supports and brackets for the installation of outdoor air conditioner units.

Heating, cooling and domestic hot water production using heat pumps brings significant economic and environmental benefits, replacing natural gas with electricity. However, for the system to be truly sustainable, it is essential that the energy is produced on-site, using a photovoltaic system. Thanks to our experience in the field, we can also help our clients in the choice and design of brackets and fittings for the installation of a photovoltaic system. In turn, this will require the installation of a fall protection system, which we can help with as well.

Discover our complete range on www.rodigas.it



MS 246 - MS 247

SLIDING BRACKETS

- ▶ Sliding
- Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- ▶ Scorrevole
- Aggancio frontale
- Barra a muro

MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate
Treatment: painting epoxy resins in polyester
Colour: Ral 9002
Joint: high resistant screw M6x70 8.8
Adjustment: 2 adjustable gummy polypropilene feet (patented)

LOAD CAPACITY

Domestic use: 140 kg
Load testing weight: 420 kg

BOX



Pack: carton box
Pieces: 1
Pack dimensions: 90x95x800 mm
Case weight: 4.2 kg

PALLET


Pallet dimensions: 120x80x100 cm
Pieces per pallet: 117
Pallet total weight: 500 kg



DIMENSIONS AND LOADING CAPACITY

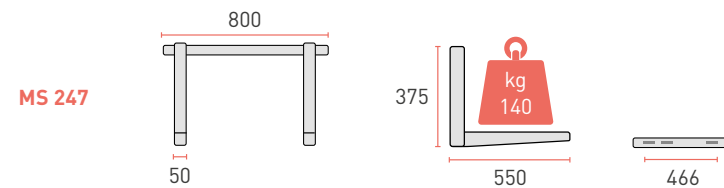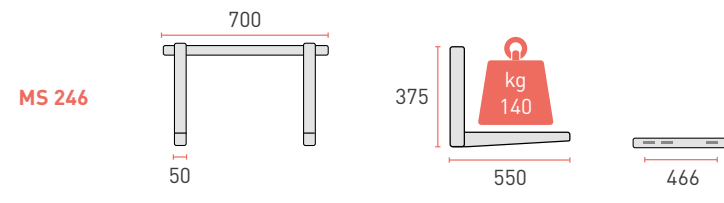

BRACKET DRILLING DIAGRAM



Adjustable rear foot



Wall fixing kit



Insulating washers



Pre assembled

MS 252 - MS 253

SLIDING BRACKETS

- ▶ Sliding
- Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- ▶ Scorrevole
- Aggancio frontale
- Barra a muro

MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate
Treatment: painting epoxy resins in polyester
Colour: Ral 9002
Joint: high resistant screw M6x70 8.8
Adjustment: 2 adjustable gummy polypropilene feet (patented)
Equipped with: level to adjust the wall bar

LOAD CAPACITY

Domestic use: 140 kg
Load testing weight: 420 kg

BOX



Pack: carton box
Pieces: 1
Pack dimensions: 90x95x800 mm
Case weight: 4.2 kg

PALLET


Pallet dimensions: 120x80x100 cm
Pieces per pallet: 117
Pallet total weight: 500 kg



DIMENSIONS AND LOADING CAPACITY

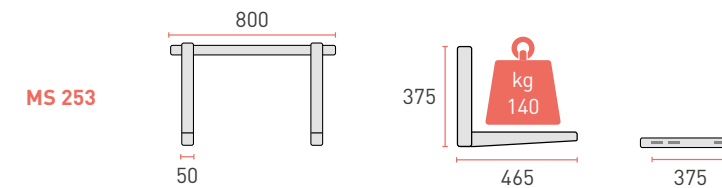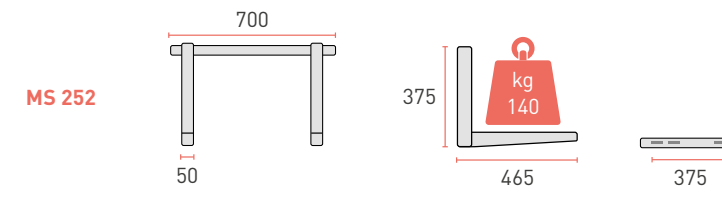

BRACKET DRILLING DIAGRAM



Adjustable rear foot



Wall fixing kit



Insulating washers



Pre assembled



Certified quality



Certified quality

MS 254 - MS 255

SLIDING BRACKETS

- ▶ Sliding
- Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- ▶ Scorrevole
- Aggancio frontale
- Barra a muro

MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate
Treatment: painting epoxy resins in polyester
Colour: Ral 9002
Joint: high resistant screw M6×70 8.8
Adjustment: 2 adjustable gummy polypropilene feet (patented)
Equipped with: level to adjust the wall bar

LOAD CAPACITY

Domestic use: 140 kg
Load testing weight: 420 kg

BOX



Pack: carton box
Pieces: 1
Pack dimensions: 90×95×800 mm
Case weight: 4.2 kg

PALLET


Pallet dimensions: 120×80×100 cm
Pieces per pallet: 117
Pallet total weight: 500 kg



DIMENSIONS AND LOADING CAPACITY

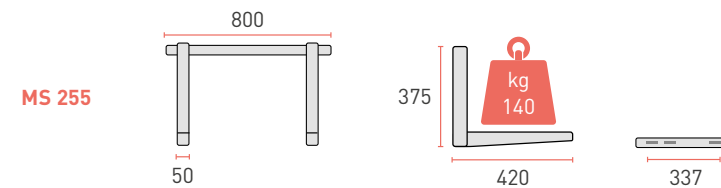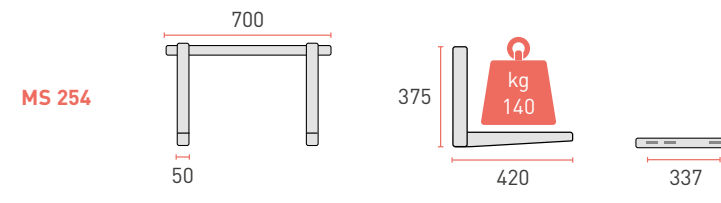

BRACKET DRILLING DIAGRAM



Adjustable rear foot



Wall fixing kit



Insulating washers



Pre assembled

MS 256 - MS 257

SLIDING BRACKETS

- ▶ Sliding
- Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- ▶ Scorrevole
- Aggancio frontale
- Barra a muro

MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate
Treatment: painting epoxy resins in polyester
Colour: Ral 9002
Joint: high resistant screw M6×70 8.8
Adjustment: 2 adjustable gummy polypropilene feet (patented)
Equipped with: level to adjust the wall bar

LOAD CAPACITY

Domestic use: 140 kg
Load testing weight: 420 kg

BOX



Pack: carton box
Pieces: 1
Pack dimensions: 90×95×800 mm
Case weight: 4.2 kg

PALLET


Pallet dimensions: 120×80×100 cm
Pieces per pallet: 117
Pallet total weight: 500 kg



DIMENSIONS AND LOADING CAPACITY

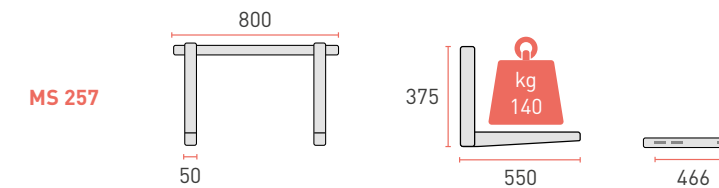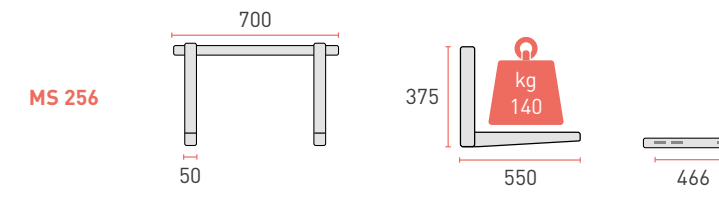

BRACKET DRILLING DIAGRAM



Adjustable rear foot




Wall fixing kit



Insulating washers



Pre assembled




Certified quality




Certified quality

WE MADE NEW 650 MM ARMS FOR A PERFECT INSTALLATION

MS 258 SLIDING BRACKET

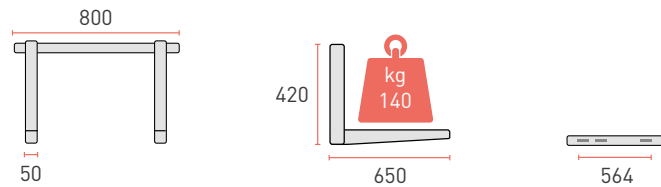

BRACKET DRILLING DIAGRAM

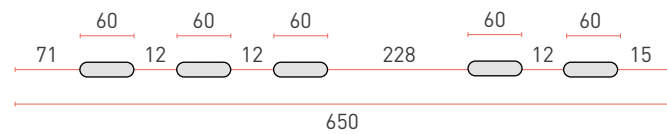

Adjustable rear foot



Wall fixing kit



Insulating washers



Pre assembled



Levelling system



MATERIALS AND TREATMENT

- Materials:** electro-galvanised steel plate
- Treatment:** painting epoxy resins in polyester
- Colour:** Ral 9002
- Joint:** 2 high resistant screw M6x70 8.8
- Adjustment:** 2 adjustable gummy polypropilene feet (patented)
- Equipped with:** level to adjust the wall bar

LOAD CAPACITY

- Load capacity:** 140 kg
- Load testing weight:** 420 kg

PACKAGING

- Pack:** carton box **Pieces:** 1
- Pack dimensions:** 90x95x1060 mm
- Case weight:** 6.4 kg
- Pallet dimensions:** 106 x 106 x 100 cm
- Pieces per pallet:** 108
- Pallet total weight:** 690 kg

OUR CERTIFICATIONS

Certified products and processes are the best quality assurance we can offer. It is for this reason that we continuously compare ourselves with accredited institutions and professionals who guide us on our journey.



Management System
ISO 9001:2015
www.tuv.com
ID: 9105073334



Management System
ISO 14001:2015
www.tuv.com
ID: 9105073334




Management System
ISO 45001:2018
www.tuv.com
ID: 9105073334




OUR BLACK BRACKETS ARE COOL AND FITS PERFECTLY WITH YOUR MACHINE


MS 253N SLIDING BRACKET

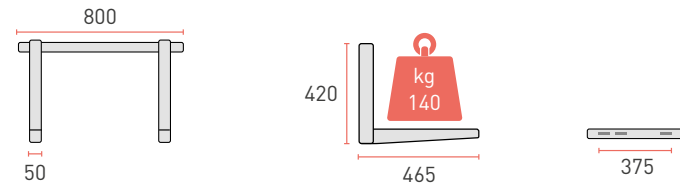


BRACKET DRILLING DIAGRAM



MS 257N SLIDING BRACKET

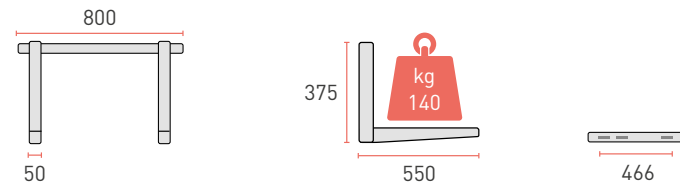

BRACKET DRILLING DIAGRAM



Adjustable rear foot



Wall fixing kit



Insulating washers



Pre assembled




Levelling system



OUR CERTIFICATIONS

Certified products and processes are the best quality assurance we can offer. It is for this reason that we continuously compare ourselves with accredited institutions and professionals who guide us on our journey.



Management System
ISO 9001:2015
www.tuv.com
ID: 9105073334



Management System
ISO 14001:2015
www.tuv.com
ID: 9105073334



Management System
ISO 45001:2018
www.tuv.com
ID: 9105073334



MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate

Treatment: painting epoxy resins in polyester

Colour: Ral 7016 matt

Joint: 2 high resistant screw M6x70 8.8

Adjustment: 2 adjustable gummy polypropilene feet (patented)

Equipped with: level to adjust the wall bar

LOAD CAPACITY

Load capacity: 140 kg

Load testing weight: 420 kg



MS 263 - MS 264

SLIDING BRACKETS

- ▶ Sliding
- Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- ▶ Scorrevole
- Aggancio frontale
- Barra a muro

MATERIALS AND TREATMENT

Materials: AISI 304 stainless steel plate

Treatment: epoxy resins in polyester

Colour: Ral 7035

Joint: high resistant screw M6x70 8.8

Adjustment: 2 adjustable gummy polypropilene feet

LOAD CAPACITY

Domestic use: 140 kg

Load testing weight: 420 kg

BOX

Pack: carton box

Pieces: 1

Pack dimensions: 90x95x800 mm

Case weight: 4.2 kg

PALLET



Pallet dimensions: 120x80x100 cm

Pieces per pallet: 117



Pallet total weight: 500 kg



DIMENSIONS AND LOADING CAPACITY

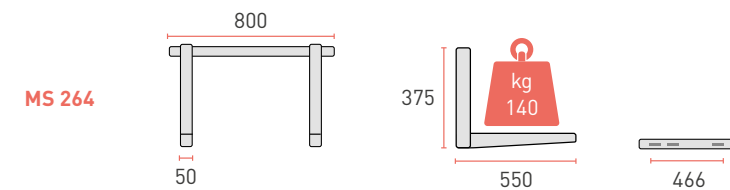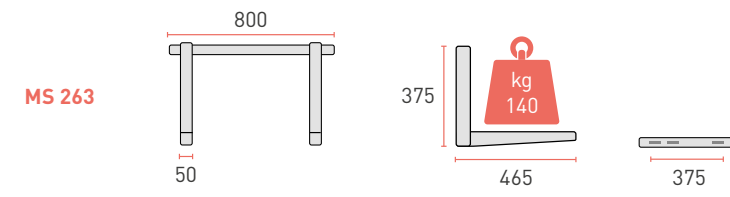

BRACKET DRILLING DIAGRAM

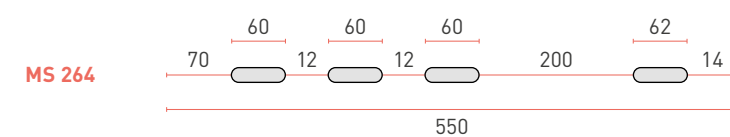

Pre assembled



Wall fixing kit



Insulating washers





Levelling system




Certified quality



DIMENSIONS AND LOADING CAPACITY

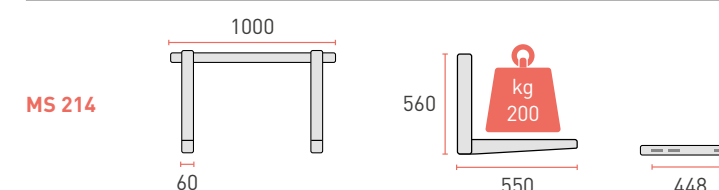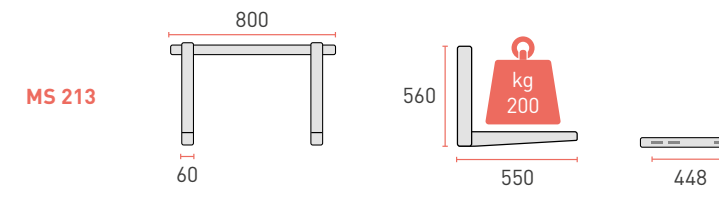

BRACKET DRILLING DIAGRAM

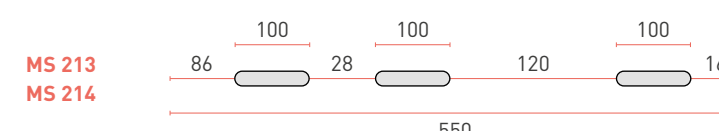

Adjustable rear foot



Wall fixing kit



Insulating washers



Levelling system



Certified quality



MS 213 - MS 214

SLIDING BRACKETS

- Sliding
- ▶ Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- Scorrevole
- ▶ Aggancio frontale
- Barra a muro

MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate

Horizontal rod material: aluminium alloy

Treatment: epoxy resins in polyester for outdoor

Colour: Ral 9002

Joint: high resistant screw M8x80 8.8

Adjustment: 4 adjustable gummy polypropilene feet (patented)

LOAD CAPACITY

Domestic use: 200 kg

Load testing weight: 600 kg

BOX

Pack: carton box

Pieces: 1

Pack dimensions: 1000x90x100 mm

Case weight: 7.5 kg

PALLET

Pallet dimensions: 120x120x100 cm

Pieces per pallet: 108

Pallet total weight: 810 kg

MS 270

ALUMINIUM BRACKET

SLIDING BRACKETS

- ▶ Sliding
- Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- ▶ Scorrevole
- Aggancio frontale
- Barra a muro

MATERIALS AND TREATMENT

Material: aluminium alloy

Treatment: epoxy resins in polyester

Colour: Ral 9002

Joint: high resistant screw M6x70 8.8

Adjustment: 2 adjustable gummy polypropilene feet

LOAD CAPACITY

Domestic use: 100 kg

BOX

Pack: carton box

Pieces: 1

Pack dimensions: 90x95x800 mm

Case weight: 2.15 kg


PALLET

Pallet dimensions: 120x80x100 cm


Pieces per pallet: 117

Pallet total weight: 250 kg

DIMENSIONS AND LOADING CAPACITY

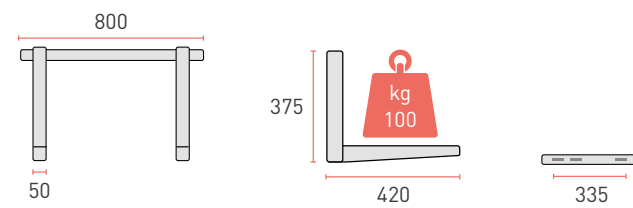

BRACKET DRILLING DIAGRAM



Insulating washers



Levelling system



Wall fixing kit



Pre assembled



Certified quality



OUR CERTIFICATIONS

Certified products and processes are the best quality assurance we can offer. It is for this reason that we continuously compare ourselves with accredited institutions and professionals who guide us on our journey.



MS 290 - MS 291

SLIDING BRACKETS

- ▶ Sliding
 - Frontal hook
 - Crossbar

MENSOLE SCORREVOLI

- ▶ Scorrevole
 - Aggancio frontale
 - Barra a muro

MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate

Treatment: epoxy resins in polyester for outdoor

Colour: Ral 9002

Joint: 2 high resistant screw M8x80 8.8

Adjustment: 4 adjustable gummy polypropilene feet (patented)

LOAD CAPACITY

Domestic use: 250 kg

Load testing weight: 500 kg



BOX

Pack: carton box


Pieces: 1



DIMENSIONS AND LOADING CAPACITY

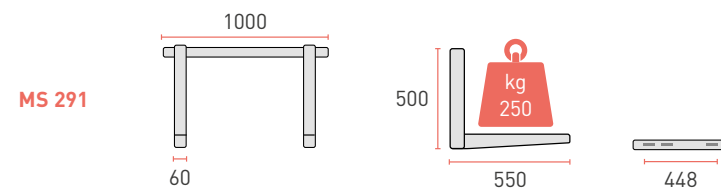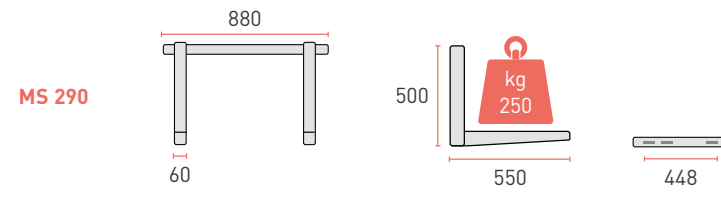

BRACKET DRILLING DIAGRAM



Adjustable rear foot



Wall fixing kit





Insulating washers




Levelling system



DIMENSIONS AND LOADING CAPACITY

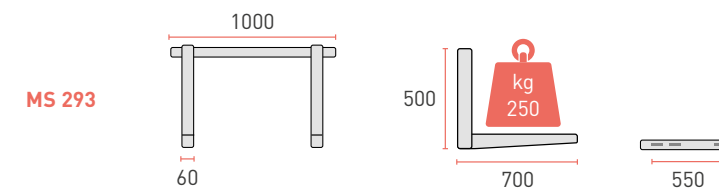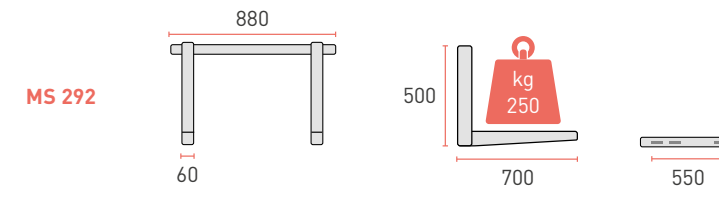

BRACKET DRILLING DIAGRAM



Adjustable rear foot



Wall fixing kit



Insulating washers



Levelling system

MS 292 - MS 293

SLIDING BRACKETS

- ▶ Sliding
 - Frontal hook
 - Crossbar

MENSOLE SCORREVOLI

- ▶ Scorrevole
 - Aggancio frontale
 - Barra a muro

MATERIALS AND TREATMENT

Shelf material: electro-galvanised steel plate

Treatment: epoxy resins in polyester for outdoor

Colour: Ral 9002

Joint: 2 high resistant screw M8x80 8.8

Adjustment: 4 adjustable gummy polypropilene feet (patented)

LOAD CAPACITY

Domestic use: 250 kg

Load testing weight: 500 kg

BOX

Pack: carton box

Pieces: 1



Certified quality



Certified quality



MS 294 - MS 295

SLIDING BRACKETS

- ▶ Sliding
 - Frontal hook
 - Crossbar

MENSOLE SCORREVOLI

- ▶ Scorrevole
 - Aggancio frontale
 - Barra a muro

MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate

Treatment: epoxy resins in polyester for outdoor

Colour: Ral 9002

Joint: 2 high resistant screw M8x80 8.8

Adjustment: 4 adjustable gummy polypropilene feet (patented)

LOAD CAPACITY

Domestic use: 200 kg

Load testing weight: 420 kg



BOX

Pack: carton box


Pieces: 1



DIMENSIONS AND LOADING CAPACITY

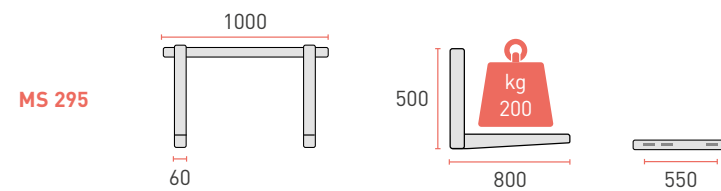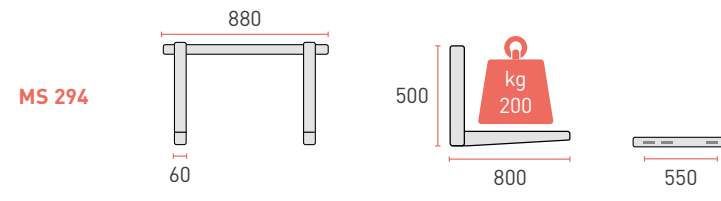

BRACKET DRILLING DIAGRAM



Adjustable rear foot



Wall fixing kit





Insulating washers




Levelling system



DIMENSIONS AND LOADING CAPACITY

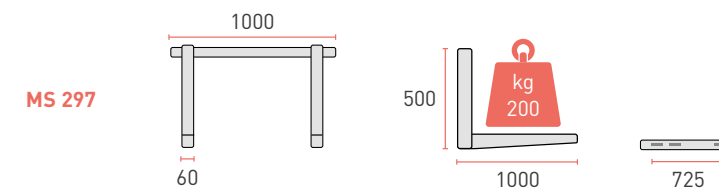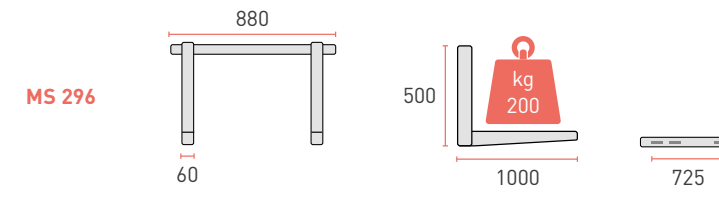

BRACKET DRILLING DIAGRAM



Adjustable rear foot



Wall fixing kit



Insulating washers



Levelling system

MS 296 - MS 297

SLIDING BRACKETS

- ▶ Sliding
 - Frontal hook
 - Crossbar

MENSOLE SCORREVOLI

- ▶ Scorrevole
 - Aggancio frontale
 - Barra a muro

MATERIALS AND TREATMENT

Shelf material: electro-galvanised steel plate

Treatment: epoxy resins in polyester for outdoor

Colour: Ral 9002

Joint: 2 high resistant screw M8x80 8.8

Adjustment: 4 adjustable gummy polypropilene feet (patented)

LOAD CAPACITY

Domestic use: 200 kg

Load testing weight: 400 kg

BOX

Pack: carton box

Pieces: 1



Certified quality



Certified quality



MS 220 - MS 222

SLIDING BRACKETS

- Sliding
- ▶ Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- Scorrevole
- ▶ Aggancio frontale
- Barra a muro

MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate

Treatment: epoxy resins in polyester for outdoor

Colour: Ral 9002

Joint: high resistant screw M6x70 8.8

Adjustment: 2 adjustable gummy polypropilene feet (patented)

Equipped with: level to adjust the wall bar

LOAD CAPACITY

Domestic use: 140 kg

Load testing weight: 420 kg

BOX

Pack: carton box

Pieces: 1

MS 220
Pack dimensions:
 90x95x800 mm
Case weight: 4.84 kg

MS 222
Pack dimensions:
 90x95x1060 mm
Case weight: 5 kg



PALLET

MS 220
Pallet dimensions:
 120x80x100 cm
Pieces per pallet:
 117
Pallet total weight:
 540 kg


MS 222
Pallet dimensions:
 106x106x100 cm
Pieces per pallet:
 108
Pallet total weight:
 600 kg



DIMENSIONS AND LOADING CAPACITY

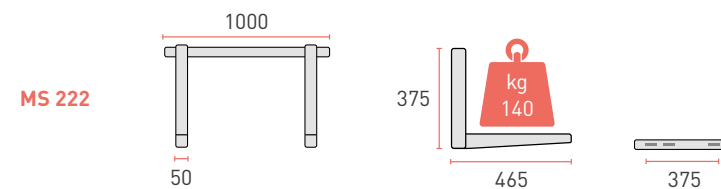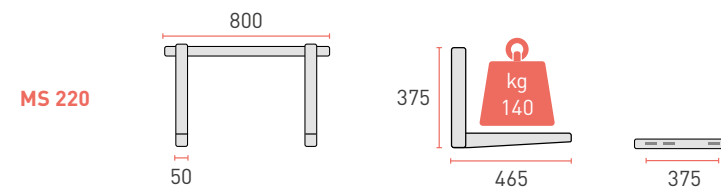

BRACKET DRILLING DIAGRAM



Adjustable rear foot



Wall fixing kit



Insulating washers



Levelling system



Certified quality

MS 221 - MS 223

SLIDING BRACKETS

- Sliding
- ▶ Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- Scorrevole
- ▶ Aggancio frontale
- Barra a muro

MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate

Treatment: epoxy resins in polyester for outdoor

Colour: Ral 9002

Joint: high resistant screw M6x70 8.8

Adjustment: 2 adjustable gummy polypropilene feet (patented)

Equipped with: level to adjust the wall bar

LOAD CAPACITY

Domestic use: 140 kg

Load testing weight: 420 kg

BOX

Pack: carton box

Pieces: 1

MS 221
Pack dimensions:
 90x95x800 mm
Case weight: 4.84 kg

MS 223
Pack dimensions:
 90x95x1060 mm
Case weight: 5 kg



PALLET

MS 221
Pallet dimensions:
 120x80x100 cm
Pieces per pallet:
 117
Pallet total weight:
 540 kg


MS 223
Pallet dimensions:
 106x106x100 cm
Pieces per pallet:
 108
Pallet total weight:
 600 kg



DIMENSIONS AND LOADING CAPACITY

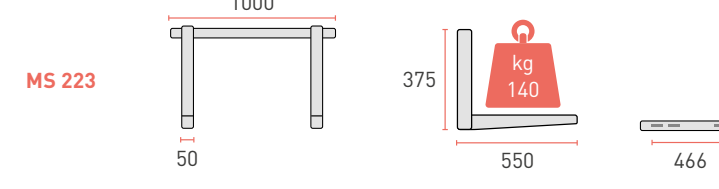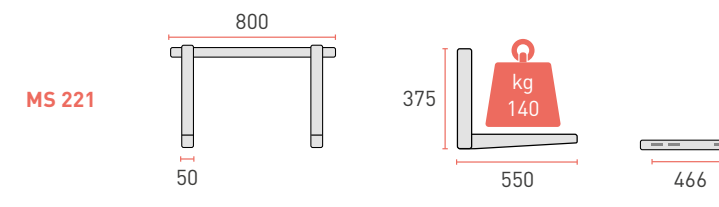

BRACKET DRILLING DIAGRAM



Adjustable rear foot



Wall fixing kit



Insulating washers



Levelling system



Certified quality

MS 224

SLIDING BRACKETS

- Sliding
- ▶ Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- Scorrevole
- ▶ Aggancio frontale
- Barra a muro

MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate

Treatment: epoxy resins in polyester for outdoor

Colour: Ral 9002

Joint: high resistant screw M6x70 8.8

Adjustment: 2 adjustable gummy polypropilene feet (patented)

LOAD CAPACITY

Domestic use: 140 kg

Load testing weight: 420 kg

BOX

Pack: carton box

Pieces: 1

Pack dimensions: 960x85x90 mm

Case weight: 4,84 kg

PALLET

Pallet dimensions: 120x120x100 cm



Pieces per pallet: 120

Pallet total weight: 540 kg



INTERNATIONAL PATENT



DIMENSIONS AND LOADING CAPACITY

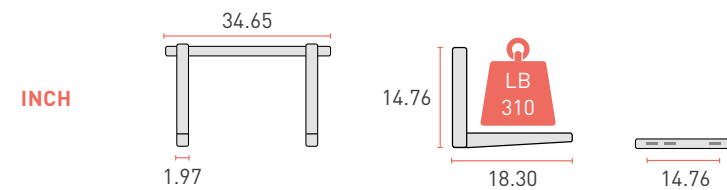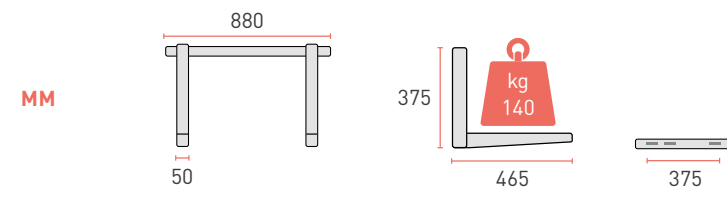



BRACKET DRILLING DIAGRAM

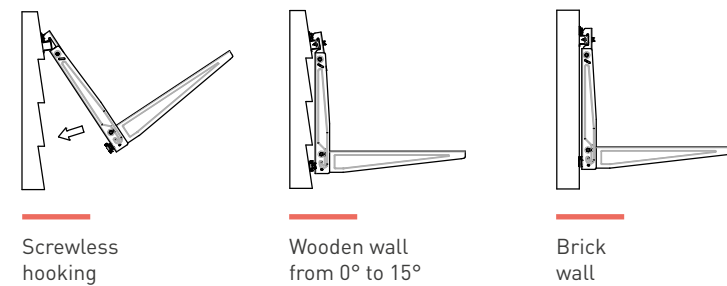



INTERNATIONAL PATENT



DIMENSIONS AND LOADING CAPACITY

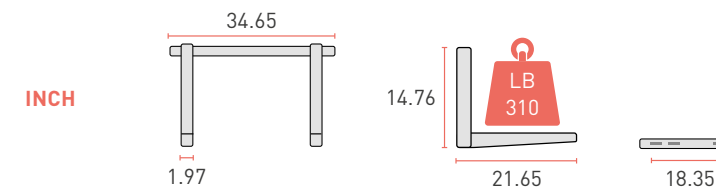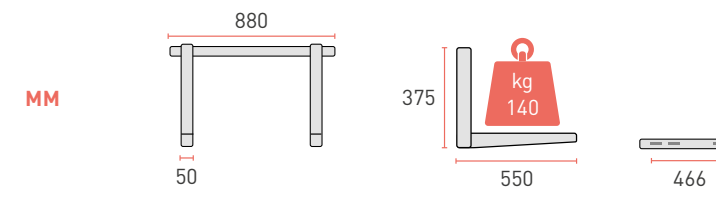

BRACKET DRILLING DIAGRAM

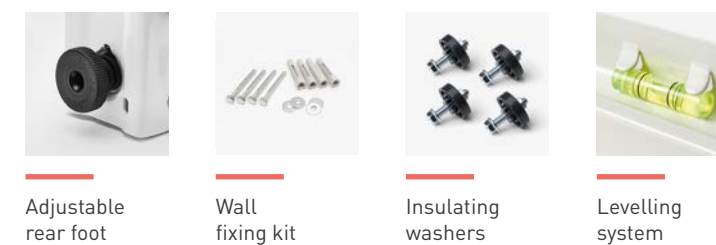

MS 225

SLIDING BRACKETS

- Sliding
- ▶ Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- Scorrevole
- ▶ Aggancio frontale
- Barra a muro

MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate

Treatment: epoxy resins in polyester for outdoor

Colour: Ral 9002

Joint: high resistant screw M6x70 8.8

Adjustment: 2 adjustable gummy polypropilene feet (patented)

LOAD CAPACITY

Domestic use: 140 kg

Load testing weight: 420 kg

BOX

Pack: carton box

Pieces: 1

Pack dimensions: 960x85x90 mm


Case weight: 4,84 kg

PALLET

Pallet dimensions: 120x120x100 cm

Pieces per pallet: 120

Pallet total weight: 540 kg

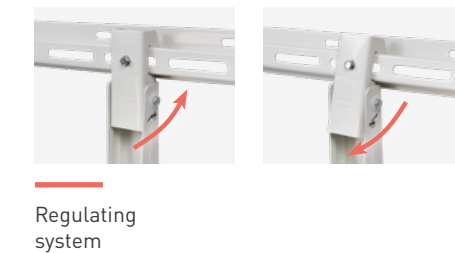

Certified quality



Certified quality

MS 207 - MS 209

SLIDING BRACKETS

- Sliding
- ▶ Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- Scorrevole
- ▶ Aggancio frontale
- Barra a muro



MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate
Horizontal rod material: aluminium alloy
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002
Adjustment: 2 adjustable gummy polypropilene feet (patented)

LOAD CAPACITY

Domestic use: 140 kg
Load testing weight: 420 kg



BOX

Pack: carton box
Pieces: 1
Pack dimensions: 90×95×1060 mm
Case weight: 5 kg



PALLET

Pallet dimensions: 120×80×100 cm
Pieces per pallet: 117
Pallet total weight: 600 kg

DIMENSIONS AND LOADING CAPACITY

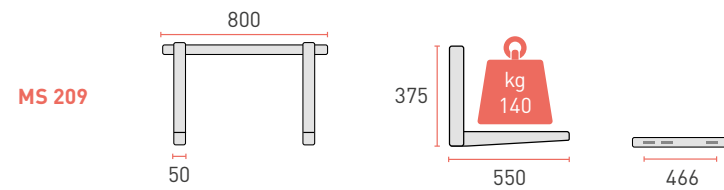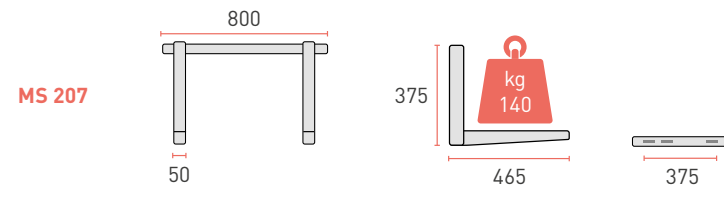

BRACKET DRILLING DIAGRAM



Adjustable rear foot



Wall fixing kit



Permanent marking



Levelling system

MS 208 - MS 219

SLIDING BRACKETS



- Sliding
- ▶ Frontal hook
- Crossbar

MENSOLE SCORREVOLI



- Scorrevole
- ▶ Aggancio frontale
- Barra a muro



DIMENSIONS AND LOADING CAPACITY

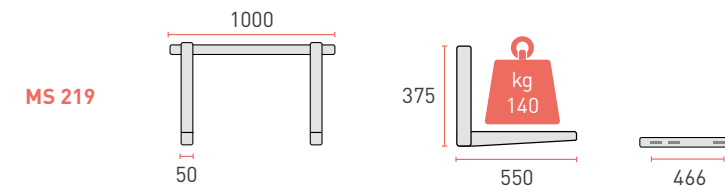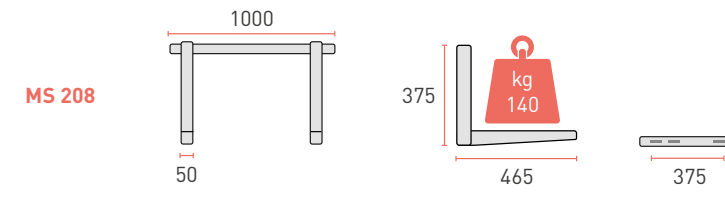

BRACKET DRILLING DIAGRAM



Adjustable rear foot



Wall fixing kit



Insulating washers



Levelling system

MATERIALS AND TREATMENT

Shelf material: electro-galvanised steel plate
Horizontal rod material: aluminium alloy
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002
Joint: high resistant screw M6×70 8.8
Adjustment: 2 adjustable gummy polypropilene feet (patented)

LOAD CAPACITY

Domestic use: 140 kg
Load testing weight: 420 kg

BOX

Pack: carton box
Pieces: 1
Pack dimensions: 90×95×1060 mm
Case weight: 5 kg

PALLET

Pallet dimensions: 106×106×100 cm
Pieces per pallet: 108
Pallet total weight: 550 kg



Certified quality



Certified quality

MS 201 - MS 202

SLIDING BRACKETS

- Sliding
- ▶ Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- Scorrevole
- ▶ Aggancio frontale
- Barra a muro

MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate

Treatment: epoxy resins in polyester for outdoor

Colour: Ral 9002

Joint: high resistant screw M6x70 8.8

Adjustment: 2 adjustable gummy polypropilene feet (patented)

LOAD CAPACITY

Domestic use: 200 kg

Load testing weight: 600 kg

BOX

Pack: carton box

Pieces: 1

Pack dimensions: 120x20x13 mm



PALLET

Pallet dimensions: 120x120x140 cm



Pieces per pallet: 40



DIMENSIONS AND LOADING CAPACITY

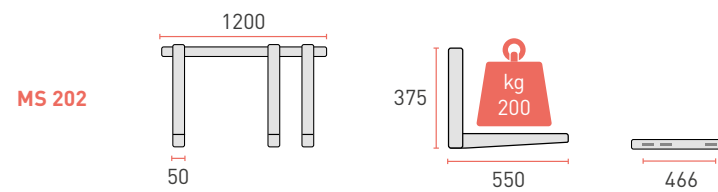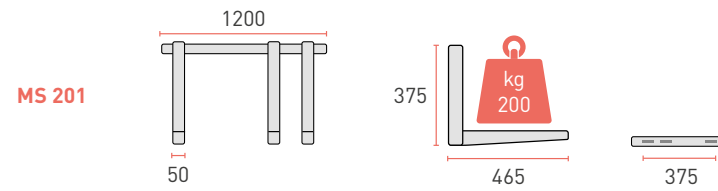

BRACKET DRILLING DIAGRAM



Adjustable rear foot



Wall fixing kit



Insulating washers



Levelling system



MS 203

SLIDING BRACKETS

- Sliding
- ▶ Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- Scorrevole
- ▶ Aggancio frontale
- Barra a muro

MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate

Treatment: epoxy resins in polyester for outdoor

Colour: Ral 9002

Joint: high resistant screw M6x70 8.8

Adjustment: 2 adjustable gummy polypropilene feet (patented)

LOAD CAPACITY

Domestic use: 300 kg

Load testing weight: 900 kg

BOX

Pack: carton box

Pieces: 1


Pack dimensions: 120x20x13 mm

PALLET


Pallet dimensions: 120x120x140 cm

Pieces per pallet: 40

DIMENSIONS AND LOADING CAPACITY

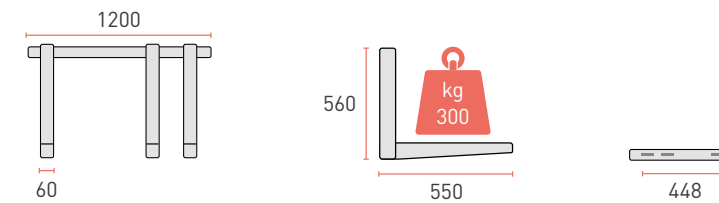

BRACKET DRILLING DIAGRAM



Adjustable rear foot



Insulating washers



Wall fixing kit



Levelling system



MS 215 - MS 216

SLIDING BRACKETS

- ▶ Sliding
- Frontal hook
- Crossbar

MENSOLE SCORREVOLI

- ▶ Scorrevole
- Aggancio frontale
- Barra a muro



MATERIALS AND TREATMENT

Materials: electro-galvanised steel plate

Treatment: epoxy resins in polyester for outdoor

Colour: Ral 9002

Joint: 2 high resistant screw M8x80 8.8

Adjustment: 6 adjustable gummy polypropilene feet (patented)

LOAD CAPACITY

Domestic use: 250 kg



Load testing weight: 500 kg

BOX



Pack: carton box

Pieces: 1

DIMENSIONS AND LOADING CAPACITY

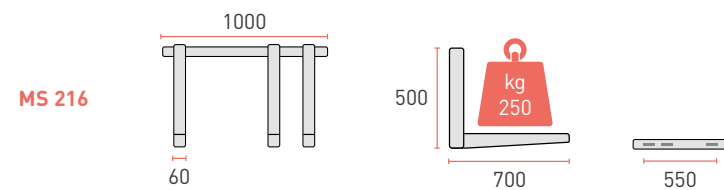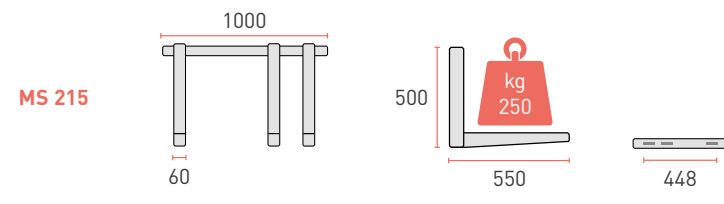

BRACKET DRILLING DIAGRAM



Adjustable rear foot



Wall fixing kit



Insulating washers



Levelling system

MS 217 - MS 218

SLIDING BRACKETS



- ▶ Sliding
- Frontal hook
- Crossbar

MENSOLE SCORREVOLI



- ▶ Scorrevole
- Aggancio frontale
- Barra a muro



DIMENSIONS AND LOADING CAPACITY

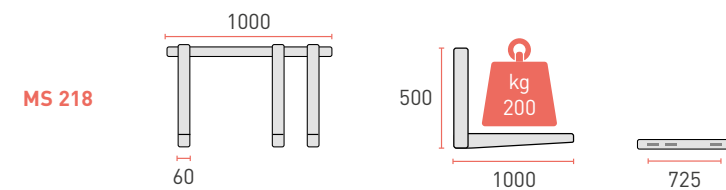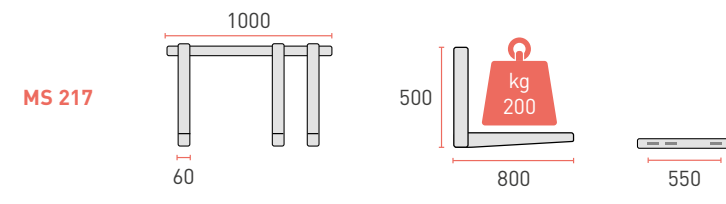

BRACKET DRILLING DIAGRAM

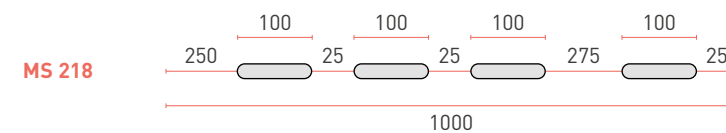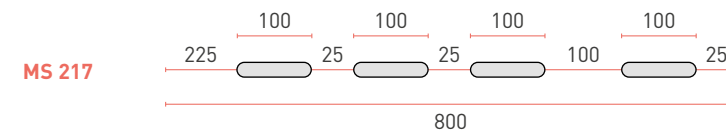

Adjustable rear foot



Wall fixing kit



Insulating washers



Levelling system

MATERIALS AND TREATMENT

Shelf material: electro-galvanised steel plate

Treatment: epoxy resins in polyester for outdoor

Colour: Ral 9002

Joint: 2 high resistant screw M8x80 8.8

Adjustment: 6 adjustable gummy polypropilene feet (patented)

LOAD CAPACITY

Domestic use: 200 kg

Load testing weight: 400 kg

BOX

Pack: carton box

Pieces: 1



Certified quality



Certified quality



MS 205/B

MS 205/B

SLIDING BRACKETS

- Sliding
- Frontal hook
- ▶ Crossbar

MENSOLE SCORREVOLI

- Scorrevole
- Aggancio frontale
- ▶ Barra a muro



MATERIALS AND TREATMENT

Shelf material: electro-galvanised steel plate

Horizontal rod material: aluminium alloy

Treatment: epoxy resins in polyester for outdoor

Colour: Ral 9002

LOAD CAPACITY

MS 205/A

Domestic use: 140 kg

Load testing weight: 420 kg

MS 205/B

Domestic use: 120 kg

Load testing weight: 360 kg

BOX

Pack: carton box

Pieces: 1

Pack dimensions: 90×95×800 mm

Case weight: 3.5 kg



PALLET

Pallet dimensions: 120×80×100 cm


Pieces per pallet: 117

Pallet total weight: 585 kg

DIMENSIONS AND LOADING CAPACITY

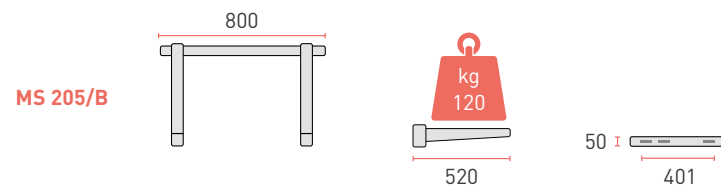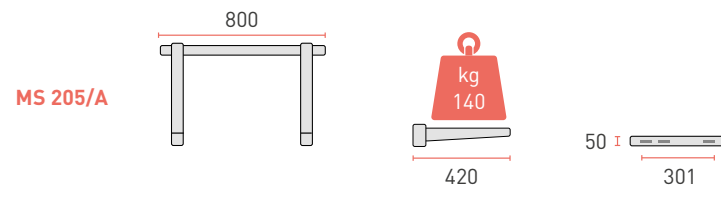

BRACKET DRILLING DIAGRAM



Wall fixing kit



Insulating washers



Levelling system



MS 206/A

MS 206/B

SLIDING BRACKETS

- Sliding
- Frontal hook
- ▶ Crossbar

MENSOLE SCORREVOLI

- Scorrevole
- Aggancio frontale
- ▶ Barra a muro

MATERIALS AND TREATMENT

Shelf material: electro-galvanised steel plate

Horizontal rod material: aluminium alloy

Treatment: epoxy resins in polyester for outdoor

Colour: Ral 9002

LOAD CAPACITY

MS 206/A

Domestic use: 140 kg

Load testing weight: 420 kg

MS 206/B

Domestic use: 120 kg

Load testing weight: 360 kg

BOX

Pack: carton box

Pieces: 1

Pack dimensions: 90×95×1060 mm

Case weight: 3.5 kg



PALLET

Pallet dimensions: 120×80×100 cm


Pieces per pallet: 117

Pallet total weight: 585 kg

DIMENSIONS AND LOADING CAPACITY

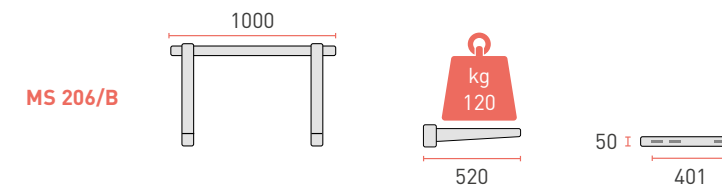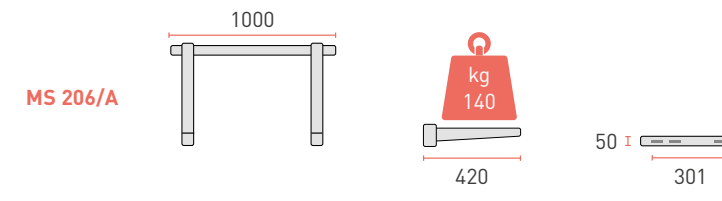

BRACKET DRILLING DIAGRAM



Wall fixing kit



Insulating washers



Levelling system

FOLDING

FOLDING BRACKETS
MENSOLE PIEGHEVOLI

Rodigas[®]
BRL 

MS 120

FOLDING BRACKETS MENSOLE PIEGHEVOLI

MATERIALS AND TREATMENT

Materials: electro-galvanised steel
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002
Joint: high resistant screw M6x70 8.8

LOAD CAPACITY

Domestic use: 140 kg
Load testing weight: 420 kg

BOX


Pack: carton box
Pieces: 1
Pack dimensions: 90x95x610 mm
Case weight: 2.44 kg

PALLET


Pallet dimensions: 120x80x100 cm
Pieces per pallet: 170
Pallet total weight: 415 kg



DIMENSIONS AND LOADING CAPACITY

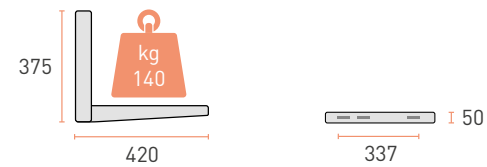

BRACKET DRILLING DIAGRAM



Wall fixing kit




Insulating washers




Permanent marking



DIMENSIONS AND LOADING CAPACITY

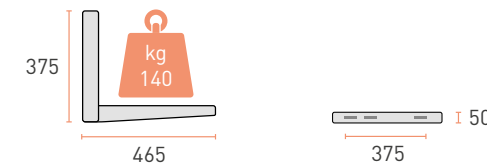

BRACKET DRILLING DIAGRAM



Wall fixing kit



Insulating washers



Permanent marking



Pre assembled



MS 117

FOLDING BRACKETS MENSOLE PIEGHEVOLI

MATERIALS AND TREATMENT

Materials: electro-galvanised steel
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002
Joint: high resistant screw M6x70 8.8

LOAD CAPACITY

Domestic use: 140 kg
Load testing weight: 420 kg

BOX

Pack: carton box
Pieces: 1
Pack dimensions: 90x95x610 mm
Case weight: 2.44 kg

PALLET

Pallet dimensions: 120x80x100 cm
Pieces per pallet: 170
Pallet total weight: 415 kg



Certified quality



Certified quality

MS 118

FOLDING BRACKETS MENSOLE PIEGHEVOLI

MATERIALS AND TREATMENT

Materials: electro-galvanised steel
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002
Joint: high resistant screw M6x70 8.8



LOAD CAPACITY

Domestic use: 140 kg
Load testing weight: 420 kg


BOX

Pack: carton box
Pieces: 1
Pack dimensions: 90x95x610 mm
Case weight: 3.8 kg


PALLET

Pallet dimensions: 120x80x100 cm
Pieces per pallet: 170
Pallet total weight: 650 kg

DIMENSIONS AND LOADING CAPACITY

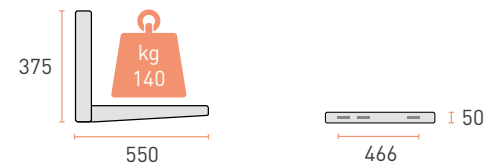

BRACKET DRILLING DIAGRAM



Wall fixing kit



Insulating washers



Permanent marking



Pre assembled



Certified quality

MS 119


FOLDING BRACKETS MENSOLE PIEGHEVOLI

MATERIALS AND TREATMENT


Materials: electro-galvanised steel
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002
Joint: high resistant screw M8x80 8.8



DIMENSIONS AND LOADING CAPACITY

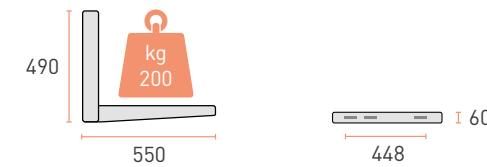

BRACKET DRILLING DIAGRAM



Wall fixing kit



Insulating washers



Permanent marking



Pre assembled



Certified quality

MS 139

FOLDING BRACKETS MENSOLE PIEGHEVOLI

MATERIALS AND TREATMENT

Materials: magnelis®
Treatment: epoxy resins in polyester for outdoor
Colour: Natural
Joint: high resistant screw M6x70 8.8

LOAD CAPACITY

Domestic use: 100 kg

BOX

Pack: carton box
Pieces: 1
Pack dimensions: 90x95x610 mm
Case weight: 2.44 kg

PALLET

Pallet dimensions: 120x80x100 cm
Pieces per pallet: 170
Pallet total weight: 415 kg

ABOUT MAGNELIS®


Our new line of technological product made in Magnelis® prevent corrosion more than standard product and is it recommended even in the most hostile environments.

Magnelis® is an exceptional metallic coating which provides a breakthrough in corrosion protection. For more info, please contact our technical team.


MAGNELIS®



DIMENSIONS AND LOADING CAPACITY

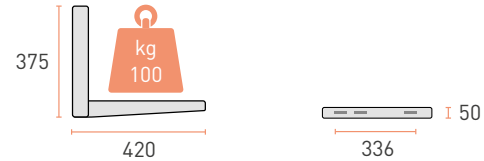

BRACKET DRILLING DIAGRAM



Wall fixing kit



Insulating washers



Permanent marking

INFORMAZIONI TECNICHE


La nostra nuova linea di prodotti tecnologici realizzati in Magnelis® impedisce la corrosione più del prodotto standard e viene consigliata anche negli ambienti più corrosivi.

Magnelis® è un rivestimento metallico eccezionale che fornisce una penetrazione nella protezione contro la corrosione. Per ulteriori informazioni, contattare il team tecnico.


ALUMINIUM ALLOY



DIMENSIONS AND LOADING CAPACITY

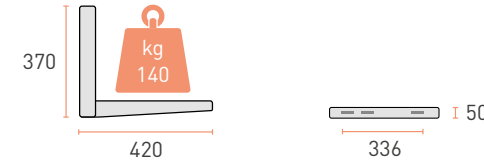

BRACKET DRILLING DIAGRAM



Wall fixing kit



Insulating washers



Permanent marking



Pre assembled



MS 103

FOLDING BRACKETS MENSOLE PIEGHEVOLI

MATERIALS AND TREATMENT

Materials: aluminium alloy
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002
Joint: high resistant screw M6x70 8.8

LOAD CAPACITY

Standard use: 140 kg

BOX

Pack: carton box
Pieces: 1
Pack dimensions: 90x95x610 mm
Case weight: 1.7 kg

PALLET

Pallet dimensions: 120x80x100 cm
Pieces per pallet: 117
Pallet total weight: 300 kg



Certified quality



Certified quality



WELDED

WELDED BRACKETS

- Sliding
- Frontal hook
- Crossbar

MENSOLE SALDATE

- Scorrevole
- Aggancio frontale
- Barra a muro

MS 105 102

WELDED BRACKETS

- ▶ Welded
 - Heavy load
 - Industrial
 - Extra load

MENSOLE SALDATE

- ▶ Saldate
 - Pesante
 - Industriale
 - Extraportata



MATERIALS AND TREATMENT

Material: pickled steel
Treatment: hot galvanizing
Colour: as treatment


BOX

MS 105 102
Pack: thermo retractable pack
Couples: 20
Single piece weight: 1.20 kg
Case weight: 45 kg


PALLET

MS 105 102
Pallet dimensions: 120×80×100 cm
Couples per pallet: 200
Pallet total weight: 480 kg



DIMENSIONS AND LOADING CAPACITY

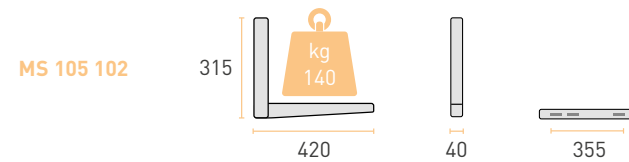



BRACKET DRILLING DIAGRAM



DIMENSIONS AND LOADING CAPACITY

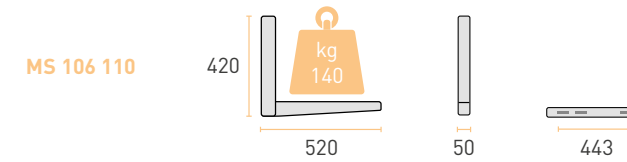

BRACKET DRILLING DIAGRAM



MS 106 110 MS 116 107

WELDED BRACKETS

- ▶ Welded
 - Heavy load
 - Industrial
 - Extra load

MENSOLE SALDATE

- ▶ Saldate
 - Pesante
 - Industriale
 - Extraportata

MATERIALS AND TREATMENT

Material: pickled steel
Treatment: hot galvanizing
Colour: as treatment

BOX

MS 106 110
Pack: thermo retractable pack
Couples: 12
Single piece weight: 1.32 kg
Case weight: 32 kg

MS 116 107
Pack: thermo retractable pack
Couples: 5
Single piece weight: 2.60 kg
Case weight: 26 kg

PALLET

MS 106 110
Pallet dimensions: 120×80×100 cm
Couples per pallet: 168
Pallet total weight: 350 kg

MS 116 107
Pallet dimensions: 120×80×100 cm
Couples per pallet: 90
Pallet total weight: 450 kg



Certified quality



Certified quality

MS 105

WELDED BRACKETS

- ▶ Welded
 - Heavy load
 - Industrial
 - Extra load

MENSOLE SALDATE

- ▶ Saldate
 - Pesante
 - Industriale
 - Extraportata



MATERIALS AND TREATMENT

Material: pickled steel

Treatment: epoxy resins in polyester for outdoor

Colour: Ral 9002

BOX

MS 105

Pack: thermo retractable pack

Couples: 20

Single piece weight: 1.20 kg

Case weight: 45 kg

PALLET


MS 105

Pallet dimensions: 120×80×100 cm


Couples per pallet: 200

Pallet total weight: 480 kg

DIMENSIONS AND LOADING CAPACITY

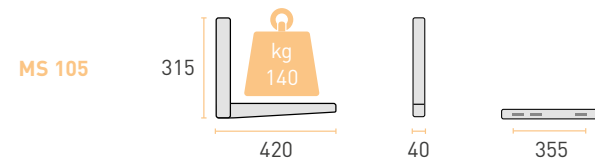

BRACKET DRILLING DIAGRAM



MS 106 - MS 116

WELDED BRACKETS

- ▶ Welded
 - Heavy load
 - Industrial
 - Extra load

MENSOLE SALDATE

- ▶ Saldate
 - Pesante
 - Industriale
 - Extraportata

MATERIALS AND TREATMENT

Material: pickled steel

Treatment: hot galvanizing

Colour: as treatment

BOX

MS 106

Pack: thermo retractable pack

Couples: 12

Single piece weight: 1.32 kg

Case weight: 32 kg

MS 116


Pack: thermo retractable pack

Couples: 5

Single piece weight: 2.60 kg

Case weight: 26 kg


DIMENSIONS AND LOADING CAPACITY

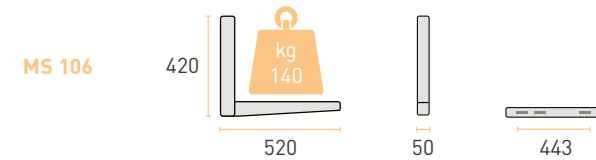

MS 116



BRACKET DRILLING DIAGRAM



MS 116



Certified quality



Certified quality

MS 105 302

WELDED BRACKETS

- ▶ Welded
 - Heavy load
 - Industrial
 - Extra load

MENSOLE SALDATE

- ▶ Saldate
 - Pesante
 - Industriale
 - Extraportata



MATERIALS AND TREATMENT

Material: pickled steel
Frist treatment: electro galvanized
Second treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002


BOX

MS 105 302
Pack: thermo retractable pack
Couples: 20
Single piece weight: 1.20 kg
Case weight: 45 kg


PALLET

MS 105 302
Pallet dimensions: 120x80x100 cm
Couples per pallet: 200
Pallet total weight: 480 kg

DIMENSIONS AND LOADING CAPACITY

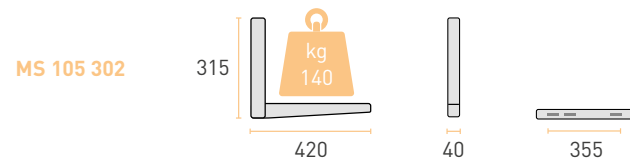

BRACKET DRILLING DIAGRAM



MS 106 303 MS 116 304


WELDED BRACKETS

- ▶ Welded
 - Heavy load
 - Industrial
 - Extra load


MENSOLE SALDATE

- ▶ Saldate
 - Pesante
 - Industriale
 - Extraportata


DIMENSIONS AND LOADING CAPACITY

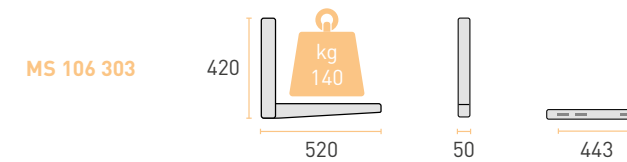


BRACKET DRILLING DIAGRAM



DIMENSIONS AND LOADING CAPACITY



BRACKET DRILLING DIAGRAM



MATERIALS AND TREATMENT

Material: pickled steel
Frist treatment: electro galvanized
Second treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002

BOX

MS 106 303
Pack: thermo retractable pack
Couples: 12
Single piece weight: 1.32 kg
Case weight: 32 kg

MS 116 304
Pack: thermo retractable pack
Couples: 5
Single piece weight: 2.60 kg
Case weight: 26 kg

PALLET

MS 106 303
Pallet dimensions: 120x80x100 cm
Couples per pallet: 168
Pallet total weight: 350 kg

MS 116 304
Pallet dimensions: 120x80x100 cm
Couples per pallet: 90
Pallet total weight: 450 kg



Certified quality



Certified quality

MS 402

WELDED BRACKETS

- ▶ Welded
 - Heavy load
 - Industrial
 - Extra load

MENSOLE SALDATE

- ▶ Saldate
 - Pesante
 - Industriale
 - Extraportata

MATERIALS AND TREATMENT

Material: pickled steel
Frist treatment: electro galvanized
Second treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002

BOX


Pack: thermo-retractable pack
Couples: 5
Case height: 130 mm
Single piece weight: 2.3 kg
Case weight: 23 kg

PALLET


Pallet dimensions: 120x80x100 cm
Couples per pallet: 70
Pallet total weight: 350 kg



DIMENSIONS AND LOADING CAPACITY

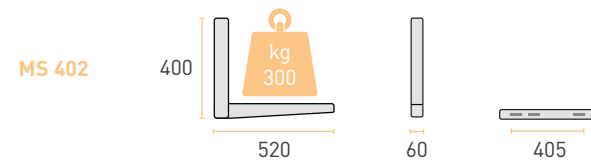

BRACKET DRILLING DIAGRAM



MS 403

WELDED BRACKETS

- ▶ Welded
 - Heavy load
 - Industrial
 - Extra load

MENSOLE SALDATE

- ▶ Saldate
 - Pesante
 - Industriale
 - Extraportata

MATERIALS AND TREATMENT

Material: pickled steel
Frist treatment: electro galvanized
Second treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002


BOX

Pack: thermo-retractable pack
Couples: 5
Case height: 130 mm
Single piece weight: 2 kg
Case weight: 20 kg


PALLET

Pallet dimensions: 120x80x100 cm
Couples per pallet: 70
Pallet total weight: 300 kg

DIMENSIONS AND LOADING CAPACITY

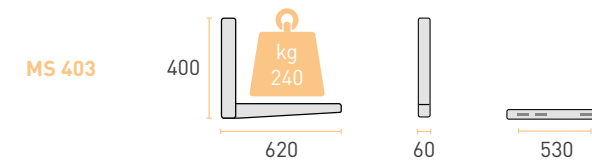

BRACKET DRILLING DIAGRAM



MS 404 - MS 405

WELDED BRACKETS

- Welded
- ▶ Heavy load
- Industrial
- Extra load

MENSOLE SALDATE

- Saldate
- ▶ Pesante
- Industriale
- Extraportata

MATERIALS AND TREATMENT

Material: pickled steel
Frist treatment: electro galvanized
Second treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002

BOX

MS 404
Pack: thermo-retractable pack
Couples: 1
Case height: 65 mm
Single piece weight: 3 kg
Case weight: 6 kg

MS 405
Pack: thermo-retractable pack
Couples: 1
Case height: 65 mm
Single piece weight: 4.5 kg
Case weight: 9 kg



PALLET

MS 404
Pallet dimensions: 120x80x100 cm
Couples per pallet: 30
Pallet total weight: 300 kg



MS 405
Pallet dimensions: 120x80x100 cm
Couples per pallet: 13
Pallet total weight: 420 kg



DIMENSIONS AND LOADING CAPACITY

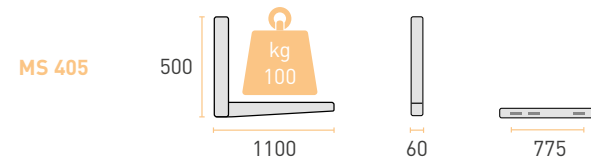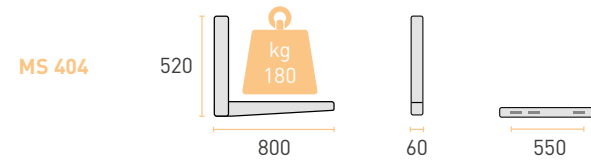

BRACKET DRILLING DIAGRAM



MS 406

WELDED BRACKETS

- Welded
- ▶ Heavy load
- Industrial
- Extra load

MENSOLE SALDATE

- Saldate
- ▶ Pesante
- Industriale
- Extraportata

MATERIALS AND TREATMENT

Material: pickled steel
Frist treatment: electro galvanized
Second treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002

BOX


MS 406
Pack: thermo-retractable pack
Couples: 1
Case height: 65 mm
Single piece weight: 2.7 kg
Case weight: 5.4 kg

PALLET


MS 406
Pallet dimensions: 120x80x100 cm
Couples per pallet: 45
Pallet total weight: 420 kg



DIMENSIONS AND LOADING CAPACITY

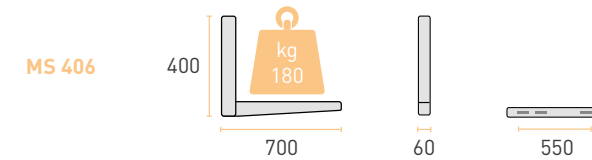

BRACKET DRILLING DIAGRAM



Certified quality



Certified quality

MS 501 - MS 502

WELDED BRACKETS

- Welded
- Heavy load
- Industrial
- Extra load

MENSOLE SALDATE

- Saldate
- Pesante
- Industriale
- Extraportata

MATERIALS AND TREATMENT

Material: pickled steel
Frist treatment: electro galvanized
Second treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002

BOX

MS 501
Pack: thermo-retractable pack
Couples: 5
Case height: 170 mm
Single piece weight: 2.6 kg
Case weight: 26 kg

MS 502
Pack: thermo-retractable pack
Couples: 5
Case height: 170 mm
Single piece weight: 3.1 kg
Case weight: 31 kg



PALLET

MS 501
Pallet dimensions: 120×80×100 cm
Couples per pallet: 60
Pallet total weight: 300 kg



MS 502
Pallet dimensions: 120×80×100 cm
Couples per pallet: 60
Pallet total weight: 350 kg



DIMENSIONS AND LOADING CAPACITY

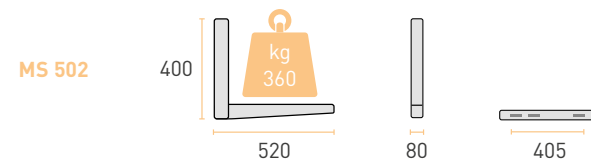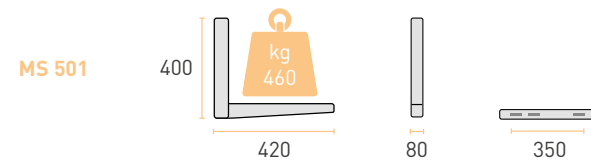

BRACKET DRILLING DIAGRAM



MS 503 - MS 504

WELDED BRACKETS

- Welded
- Heavy load
- Industrial
- Extra load

MENSOLE SALDATE

- Saldate
- Pesante
- Industriale
- Extraportata

MATERIALS AND TREATMENT

Material: pickled steel
Frist treatment: electro galvanized
Second treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002

BOX

MS 503
Pack: thermo-retractable pack
Couples: 5
Case height: 170 mm
Single piece weight: 3.5 kg
Case weight: 35 kg

MS 504
Pack: thermo-retractable pack
Couples: 1
Case height: 80 mm
Single piece weight: 3.9 kg
Case weight: 8 kg



PALLET

MS 503
Pallet dimensions: 120×80×100 cm
Couples per pallet: 60
Pallet total weight: 400 kg



MS 504
Pallet dimensions: 120×80×100 cm
Couples per pallet: 24
Pallet total weight: 200 kg



DIMENSIONS AND LOADING CAPACITY

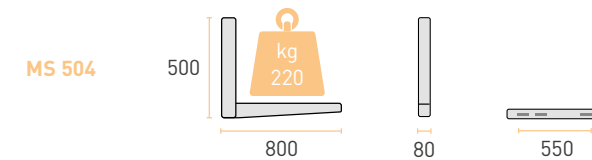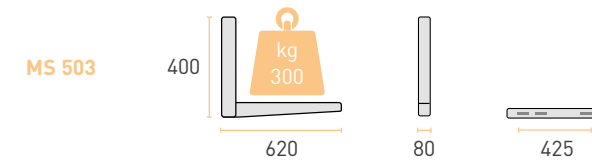

BRACKET DRILLING DIAGRAM



Certified quality



Certified quality

MS 505

WELDED BRACKETS

- Welded
- Heavy load
- ▶ Industrial
- Extra load

MENSOLE SALDATE

- Saldate
- Pesante
- ▶ Industriale
- Extraportata

MATERIALS AND TREATMENT

Material: pickled steel
Frist treatment: electro galvanized
Second treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002

BOX


MS 505
Pack: thermo-retractable pack
Couples: 1
Case height: 80 mm
Single piece weight: 7 kg
Case weight: 14 kg

PALLET


MS 505
Pallet dimensions: 120x80x100 cm
Couples per pallet: 9




DIMENSIONS AND LOADING CAPACITY

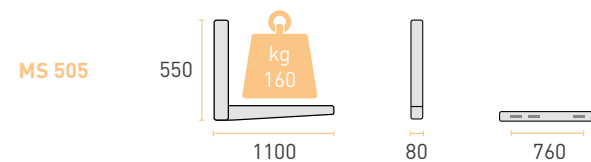


BRACKET DRILLING DIAGRAM



DIMENSIONS AND LOADING CAPACITY

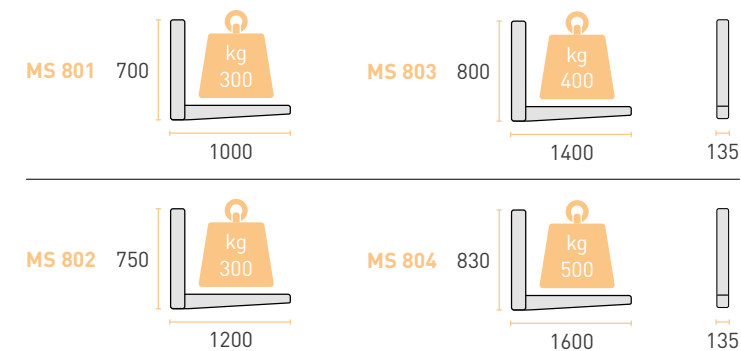

BRACKET DRILLING DIAGRAM

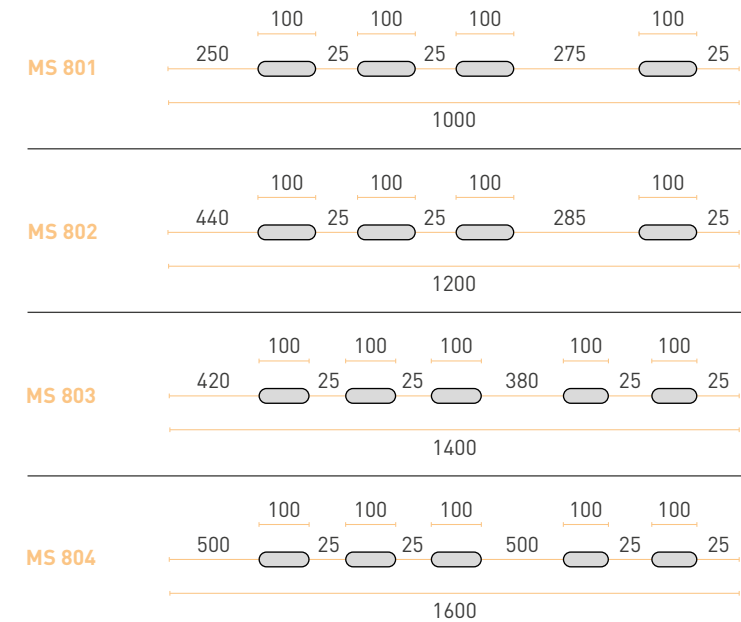

MS 801 - MS 802 MS 803 - MS 804

WELDED BRACKETS

- Welded
- Heavy load
- Industrial
- ▶ Extra load

MENSOLE SALDATE

- Saldate
- Pesante
- Industriale
- ▶ Extraportata

MATERIALS AND TREATMENT

Material: pickled steel
Frist treatment: electro galvanized
Second treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002

BOX

Pack: thermo retractable pack
Couples: 1
Case height: 150 mm

PALLET

Pallet dimensions: 120x80x100 cm



Industrial fixing

High resistance



Certified quality



Certified quality

MS 111 - MS 112 MS 153

WELDED BRACKETS

- ▶ Welded
 - Heavy load
 - Industrial
 - Extra load

MENSOLE SALDATE

- ▶ Saldate
 - Pesante
 - Industriale
 - Extraportata

MATERIALS AND TREATMENT

Material: AISI 304 stainless steel plate

Treatment: epoxy resins in polyester

Colour MS 111: Ral 7035

Colour MS 112: Ral 9002

Colour MS 153: Ral 7035

BOX

MS 111 - MS 112

Pack: thermo-retractable pack

Couples: 10

Single piece weight: 1.9 kg

Case weight: 19 kg

MS 153

Pack: thermo-retractable pack

Couples: 1

PALLET

MS 111 - MS 112

Pallet dimensions: 120x80x100 cm

Couples per pallet: 200

Pallet total weight: 480 kg



MS 153

Pallet dimensions: 120x80x120 cm



Couples per pallet: 30





DIMENSIONS AND LOADING CAPACITY

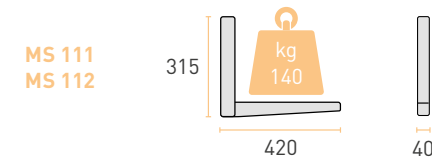



BRACKET DRILLING DIAGRAM

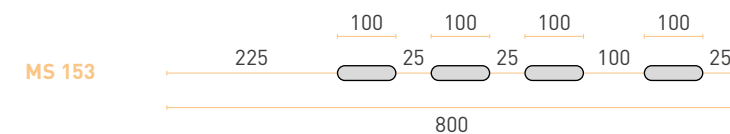

DIMENSIONS AND LOADING CAPACITY

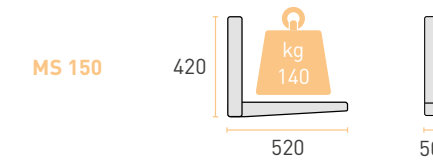

BRACKET DRILLING DIAGRAM

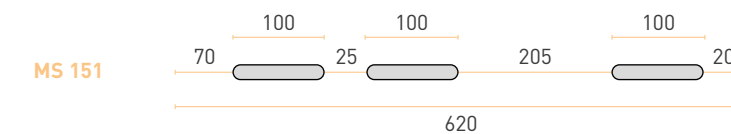

MS 150 - MS 151

WELDED BRACKETS

- ▶ Welded
 - Heavy load
 - Industrial
 - Extra load

MENSOLE SALDATE

- ▶ Saldate
 - Pesante
 - Industriale
 - Extraportata

MATERIALS AND TREATMENT

Material: AISI 304 stainless steel plate

Treatment: epoxy resins in polyester on request

Colour: Ral 7035

BOX

MS 150

Pack: thermo-retractable pack

Couples: 5

Single piece weight: 3.10 kg

Case weight: 20 kg

MS 151

Pack: thermo-retractable pack

Couples: 5

Single piece weight: 3.60 kg

Case weight: 20 kg

PALLET

MS 150

Pallet dimensions: 120x80x100 cm

Couples per pallet: 70

Pallet total weight: 300 kg

MS 151

Pallet dimensions: 120x80x100 cm

Couples per pallet: 70

Pallet total weight: 300 kg



Certified quality



Certified quality

MV 105 - MV 106

WELDED BRACKETS

- ▶ Welded
 - Heavy load
 - Industrial
 - Extra load

MENSOLE SALDATE

- ▶ Saldate
 - Pesante
 - Industriale
 - Extraportata

MATERIALS AND TREATMENT

Material: pickled steel
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002

LOAD CAPACITY

Domestic use: 140 kg
Load testing weight: 420 kg

BOX

MV 105
Pack: thermo-retractable pack
Couples: 20
Case height: 200 mm
Single piece weight: 1.12 kg
Case weight: 45 kg

MV 106
Pack: thermo-retractable pack
Couples: 12
Case height: 165 mm
Single piece weight: 1.32 kg
Case weight: 32 kg



PALLET

MV 105
Pallet dimensions: 120×80×100 cm
Couples per pallet: 200
Pallet total weight: 480 kg



MV 106
Pallet dimensions: 120×80×100 cm
Couples per pallet: 168
Pallet total weight: 350 kg



DIMENSIONS AND LOADING CAPACITY

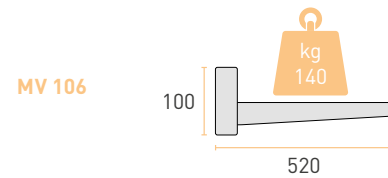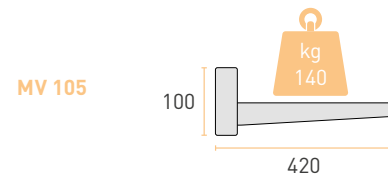

BRACKET DRILLING DIAGRAM

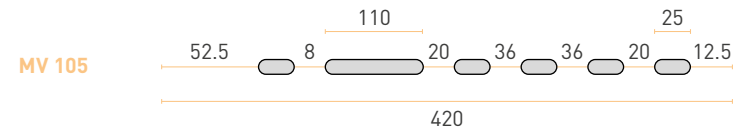

Permanent marking



Certified welds



Certified quality

MR 105 - MR 106

WELDED BRACKETS

- ▶ Welded
 - Heavy load
 - Industrial
 - Extra load

MENSOLE SALDATE

- ▶ Saldate
 - Pesante
 - Industriale
 - Extraportata

MATERIALS AND TREATMENT

Material: pickled steel
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002

LOAD CAPACITY

Domestic use: 140 kg
Load testing weight: 420 kg

BOX

MR 105
Pack: thermo-retractable pack
Couples: 20
Single piece weight: 1.12 kg
Case weight: 45 kg

MR 106
Pack: thermo-retractable pack
Couples: 12
Single piece weight: 1.32 kg
Case weight: 32 kg


PALLET

MR 105
Pallet dimensions: 120×80×100 cm
Couples per pallet: 200
Pallet total weight: 480 kg



MR 106
Pallet dimensions: 120×80×100 cm
Couples per pallet: 168
Pallet total weight: 350 kg



DIMENSIONS AND LOADING CAPACITY

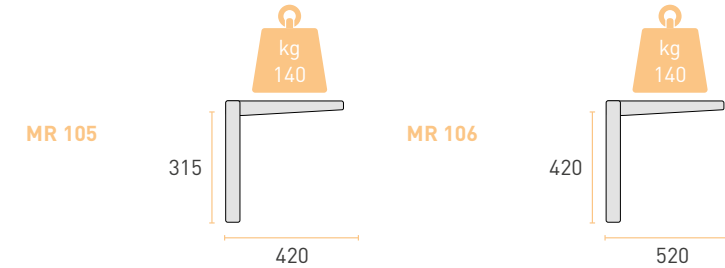

BRACKET DRILLING DIAGRAM

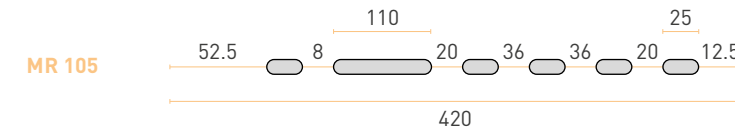

Permanent marking



Certified welds



Certified quality

ROOF

ROOF BRACKETS
MENSOLE DA TETTO

MT 630 - MT 650

ROOF BRACKETS MENSOLE DA TETTO

MATERIALS AND TREATMENT

Material: electro-galvanised steel
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002
Inclination: min 20° - max 51°

LOAD CAPACITY

Domestic use: 140 kg
Load testing weight: 420 kg

BOX

MT 630
Pack: carton box
Pieces: 1
Pack dimensions: 90x95x1060 mm
Case weight: 5.75 kg



MT 650
Pack: carton box
Pieces: 1
Pack dimensions: 90x95x1060 mm
Case weight: 6.45 kg

PALLET



Pallet dimensions: 106x106x100 cm
Pieces per pallet: 108
Pallet total weight: 550 kg



DIMENSIONS AND LOADING CAPACITY

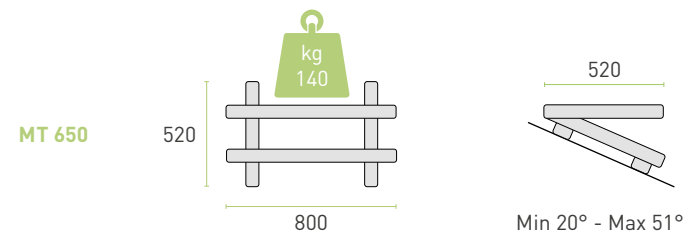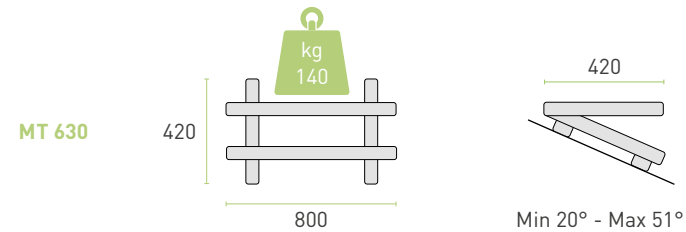

BRACKET DRILLING DIAGRAM

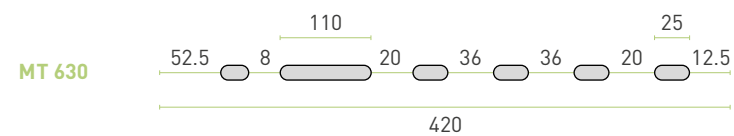

MT 630 - MT 650 - ROOF BRACKETS

Roof bracket among the most used, it allows a rapid and accurate installation. It is supplied with air bubble level to simplify the installation and with polystyrene shims to facilitate the positioning on the roof tiles. In the assembly kit there are also the vibrations dampers to connect the air-conditioning unit and the stainless steel slat kit to fix the product to the roof.

MT 630 - MT 650 - MENSOLE DA TETTO

Mensola da tetto tra le più utilizzate, permette una rapida e precisa installazione. Viene fornita completa di livella per semplificare l'installazione e spessori in polistirolo espanso per facilitare il posizionamento sui coppi e tegole. Nel kit di assemblaggio si trovano anche le rondelle isolanti per collegare il condizionatore e il kit di lamelle in inox per fissare il prodotto alla copertura.



FRONTAL FIXING



VIBRATIONS DAMPERS



HOLES TO REGULATE THE INCLINATION



INSULATING WASHERS



LEVELLING SYSTEM



FIXING KIT



Certified quality



Certified quality

MT 600

ROOF BRACKETS MENSOLE DA TETTO

MATERIALS AND TREATMENT

- Material:** electro-galvanised steel
- Treatment:** epoxy resins in polyester for outdoor
- Colour:** Ral 9002
- Adjustable bars:** M12 stainless steel threaded stumps
- Bolts and nuts:** stainless steel

LOAD CAPACITY

- Domestic use:** 140 kg
- Load testing weight:** 420 kg

BOX


- Pack:** carton box
- Pieces:** 1
- Pack dimensions:** 90x95x1060 mm
- Case weight:** 6.28 kg

PALLET


- Pallet dimensions:** 106x106x100 cm
- Pieces per pallet:** 108
- Pallet total weight:** 550 kg



DIMENSIONS AND LOADING CAPACITY

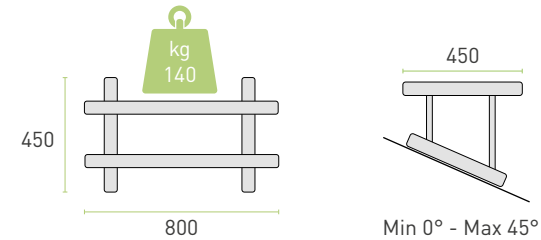

BRACKET DRILLING DIAGRAM



Insulating washers




Insulating washers




Levelling system



DIMENSIONS AND LOADING CAPACITY

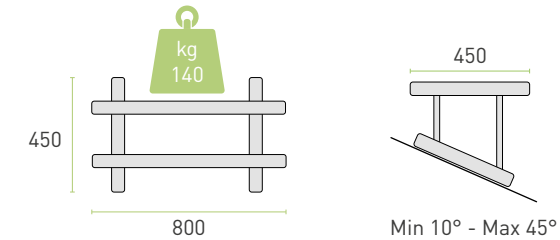

BRACKET DRILLING DIAGRAM



Insulating washers



Levelling system



MT 660

ROOF BRACKETS MENSOLE DA TETTO

MATERIALS AND TREATMENT

- Material:** electro-galvanised steel
- Treatment:** epoxy resins in polyester for outdoor
- Colour:** Ral 9002
- Adjustable bars:** M12 stainless steel threaded stumps
- Bolts and nuts:** stainless steel

LOAD CAPACITY

- Domestic use:** 140 kg

BOX

- Pack:** carton box
- Pieces:** 1
- Pack dimensions:** 90x95x1060 mm
- Case weight:** 5.0 kg

PALLET

- Pallet dimensions:** 106x106x100 cm
- Pieces per pallet:** 108
- Pallet total weight:** 550 kg



Certified quality



Certified quality

SPECIAL

SPECIAL BRACKETS
MENSOLE SPECIALI

MS 750

SPECIAL BRACKETS MENSOLE SPECIALI

MATERIALS AND TREATMENT


Materials: electro-galvanised steel plate
Treatment: painting epoxy resins in polyester
Colour: Ral 9002
Adjustment: high resistant screw M8x60 8.8
Colour: Ral 9002




LOAD CAPACITY

Load Capacity: 200 kg

DIMENSIONS AND LOADING CAPACITY

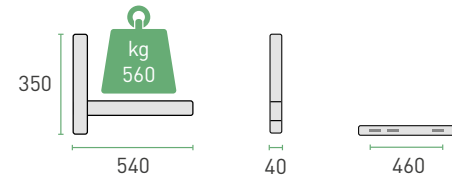

BRACKET DRILLING DIAGRAM



Insulating washers



Adjustable arm




Wall fixing kit

MS 760 - MS 761


SPECIAL BRACKETS MENSOLE SPECIALI

MATERIALS AND TREATMENT



Materials: electro-galvanised steel plate
Treatment: painting epoxy resins in polyester
Colour: Ral 9002
Joint: high resistant screw M8x20 8.8
Colour: Ral 9002

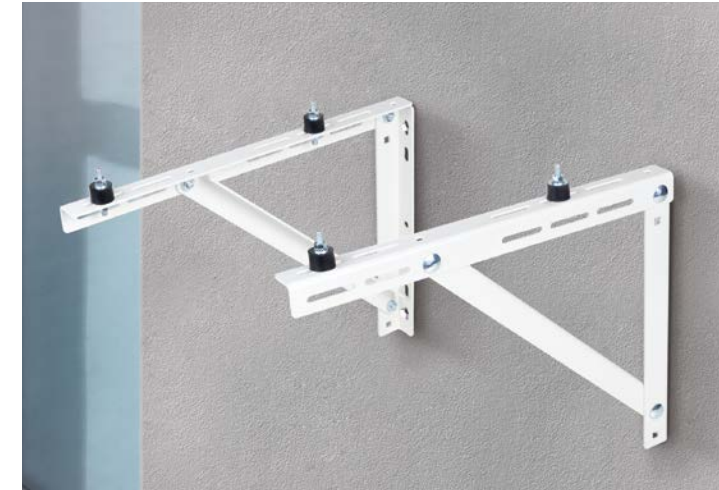

DIMENSIONS AND LOADING CAPACITY

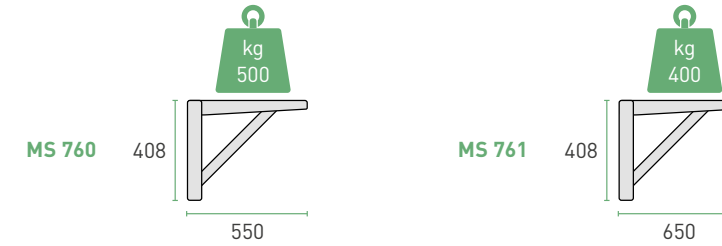

BRACKET DRILLING DIAGRAM



Structural profile



Assembleable bracket



AV 101 optional



Wall fixing kit



Certified quality



Certified quality

MC 700

SPECIAL BRACKETS MENSOLE SPECIALI

MATERIALS AND TREATMENT

Material: electro-galvanised steel
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002

LOAD CAPACITY


Domestic use: 140 kg
Load testing weight: 420 kg

BOX


Pack: nylon packaging
Couples: 1
Pack dimensions: 800x420x50 mm
Working height: 560 mm
Case weight: 8.2 kg



DIMENSIONS AND LOADING CAPACITY

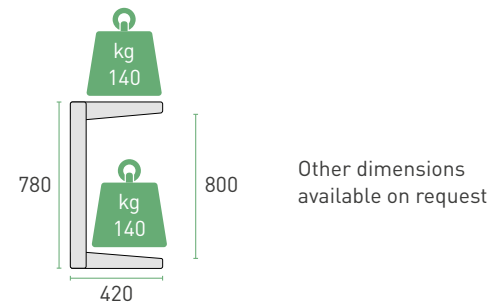

BRACKET DRILLING DIAGRAM



Permanent marking



Certified welds



MC 720

SPECIAL BRACKETS MENSOLE SPECIALI

MATERIALS AND TREATMENT

Material: steel
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002

LOAD CAPACITY


Domestic use: 140 kg
Load testing weight: 420 kg

BOX


Pack: nylon packaging
Couples: 1
Pack dimensions: 800x420x50 mm



DIMENSIONS AND LOADING CAPACITY

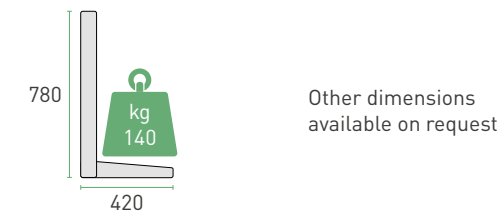

BRACKET DRILLING DIAGRAM

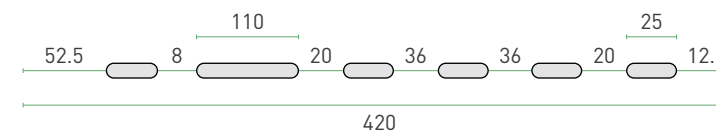

Permanent marking



Certified welds



Certified quality



Certified quality

MS 105 SC1 MS 125 SC1 MS 106 SC1

SPECIAL BRACKETS MENSOLE SPECIALI

MATERIALS AND TREATMENT

Material: steel
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002

BOX

MS 105 SC1
Couples: 1
Pack width: 330 mm
Pack length: 460 mm
Pack height: 50 mm

MS 125 SC1
Couples: 1
Pack width: 430 mm
Pack length: 470 mm
Pack height: 55 mm

MS 106 SC1
Couples: 1
Pack width: 430 mm
Pack length: 580 mm
Pack height: 55 mm

PALLET



MS 105 SC1
Pallet dimensions: 120×80×200 cm
Pieces per pallet: 200

MS 125 SC1
Pallet dimensions: 120×80×200 cm
Pieces per pallet: 152

MS 106 SC1
Pallet dimensions: 120×80×200 cm
Pieces per pallet: 128





BRACKET DRILLING DIAGRAM



DIMENSIONS AND LOADING CAPACITY



BRACKET DRILLING DIAGRAM



Wall fixing kit



Insulating washers



Levelling system

MF 220 - MF 221

SPECIAL BRACKETS MENSOLE SPECIALI

MATERIALS AND TREATMENT

Material: electro-galvanised steel plate
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002
Joint: high resistant screw M6×70 8.8
Adjustment: 2 adjustable gummy polypropilene feet (patented)

BOX

Pack: carton box
Pieces: 1
Pack dimensions: 970×85×90 mm
Case weight: 4.84 kg

PALLET

Pallet dimensions: 106×106×100 cm
Pieces per pallet: 108 kg
Pallet total weight: 540 kg



Certified quality



Certified quality

MC 702

SPECIAL BRACKETS
MENSOLE SPECIALI

MATERIALS AND TREATMENT

Material: steel
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002

LOAD CAPACITY

Domestic use: 140 kg
Load testing weight: 420 kg

BOX


Pack: 1 couple
Pack width: 430 mm
Pack length: 580 mm
Case height: 55 mm

PALLET

Pallet dimensions: 100x120x190 cm
Pieces per pallet: 128



DIMENSIONS AND LOADING CAPACITY



BRACKET DRILLING DIAGRAM




Wall fixing kit




Insulating washers



DIMENSIONS AND LOADING CAPACITY

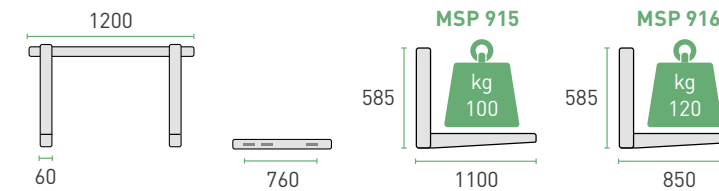

BRACKET DRILLING DIAGRAM

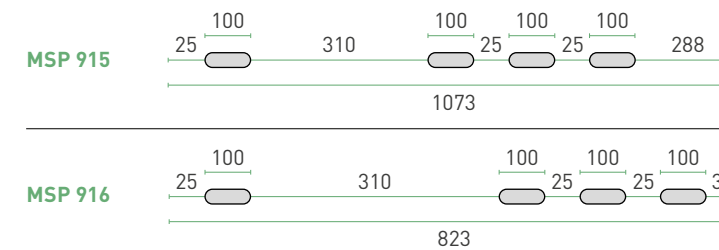

MSP 915 MSP 916

SPECIAL BRACKETS
MENSOLE SPECIALI

MATERIALS AND TREATMENT

Vertical rod material: extruded aluminium alloy
Material: electro-galvanised steel plate
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 7021
Joint: high resistant screw M8x80 8.8
Adjustment: 4 adjustable gummy polypropilene feet (patented)


LOAD CAPACITY

MSP 915 Standard use: 100 kg
MSP 916 Standard use: 120 kg

BOX

Pack: carton box
Pieces: 1

EXAMPLE OF INSTALLATION

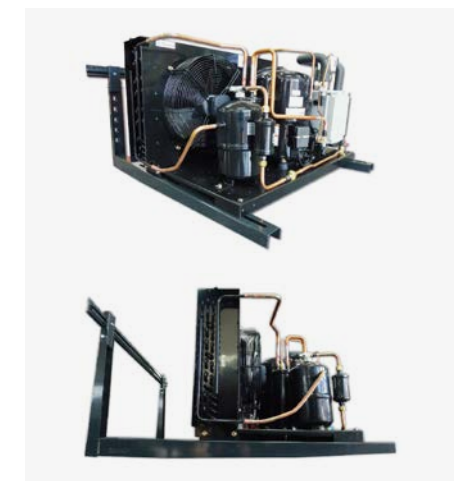

Certified quality



Certified quality

FLOOR

FLOOR SUPPORTS

- PVC
- Single
- Steel
- Modular

SUPPORTI PAVIMENTO

- PVC
- Singolo
- Lamiera
- Componibile

SP 3 - SP 4 SP 1000 SPE 3 - SPE 4

FLOOR SUPPORTS

- ▶ PVC
 - Single
 - Steel
 - Modular

SUPPORTI PAVIMENTO

- ▶ PVC
 - Singolo
 - Lamiera
 - Componibile



MATERIALS AND TREATMENT

Material: Hard PVC self-extinguishing VO

SP series equipped with:
4 fixing elements M 10
4 sticky vibroflex

SPE series equipped with:
4 fixing elements M 10

AVAILABLE ACCESSORIES

TS
Front cap height: 100 mm
Case: 24 pieces

TSE
Front cap height: 80 mm
Case: 24 pieces

PALLET

Pallet dimensions: 120x80x100 cm

Fixing screw



SP 510

FLOOR SUPPORTS

- PVC
 - ▶ Single
 - Steel
 - Modular

SUPPORTI PAVIMENTO

- PVC
 - ▶ Singolo
 - Lamiera
 - Componibile

TECHNICAL CHARACTERISTICS

Material: PVC

Equipped with: antivibration and anti-slip system gummy ring


Case: 12 kit x 4 pcs

LOAD CAPACITY


Domestic use: 400 kg

DIMENSIONS AND LOADING CAPACITY


SP 3




SP 4




SP 1000



SPE 3





SPE 4



BOX

CODE	CASE	PIECES	CASE DIMENSIONS	CASE WEIGHT
SP 3	Carton case	24	370x560x430	14.5 kg
SP 4	Carton case	24	470x560x430	18.5 kg
SP 1000	Carton case	4	1030x210x210	8 kg
SPE 3	Carton case	24	360x450x350	10 kg
SPE 4	Carton case	24	460x460x350	13 kg

DIMENSIONS AND LOADING CAPACITY



Anti vibration

No slip system

SP 635 - SP 645

FLOOR SUPPORTS

- PVC
- Single
- ▶ Steel
- Modular

SUPPORTI PAVIMENTO

- PVC
- Singolo
- ▶ Lamiera
- Componibile

MATERIALS AND TREATMENT

Material: galvanized steel

Colour: Ral 9002

Equipped with: vibration dampers and no slip washers

Case: 1 couple

PALLET

Pallet dimensions: 120x80x100 cm


BOX

CODE	CASE	PIECES
SP 635	Carton case	10
SP 645	Carton case	10




DIMENSIONS AND LOADING CAPACITY

SP 635



SP 645




BRACKET DRILLING DIAGRAM




Optional insulating washers



DIMENSIONS AND LOADING CAPACITY

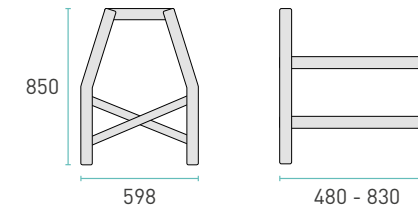


BRACKET DRILLING DIAGRAM



Insulating washers



AV 740
Optional feet dampers



SP 709
Optional rivet

SP 750

FLOOR SUPPORTS

- PVC
- Single
- Steel
- ▶ Modular

SUPPORTI PAVIMENTO

- PVC
- Singolo
- Lamiera
- ▶ Componibile

TECHNICAL CHARACTERISTICS

Material: galvanized steel

Colour: Ral 9002

Equipped with: vibration dampers and assembling screws

Case: 1 support

Extension:
Min L= 480 mm
Max L= 830 mm

LOAD CAPACITY

Domestic use: 200 kg

SP 700 - SP 740 SP 701 - SP 741

FLOOR SUPPORTS

- PVC
- Single
- Steel
- Modular

SUPPORTI PAVIMENTO

- PVC
- Singolo
- Lamiera
- Componibile

TECHNICAL CHARACTERISTICS

Equipped with: vibration dampers and assembling screws

Case: 1 support

Pieces per pallet: 170

Extension:
Min L= 480 mm
Max L= 830 mm

SP 700 - SP 740

Material: galvanized steel
Colour: Ral 9002

SP 701 - SP 741



Material: stainless steel
Colour: Ral 7035

LOAD CAPACITY


Domestic use: 200 kg



DIMENSIONS AND LOADING CAPACITY

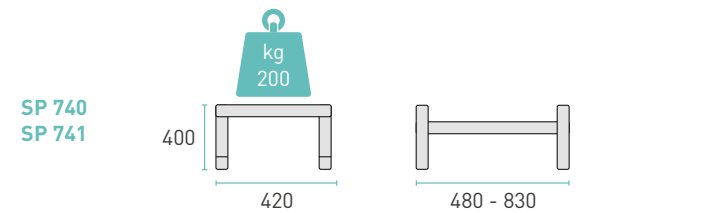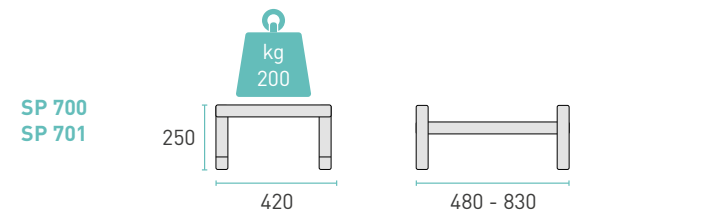


BRACKET DRILLING DIAGRAM




Insulating washers



AV 740
Optional foot dampers



SP 709
Optional rivet

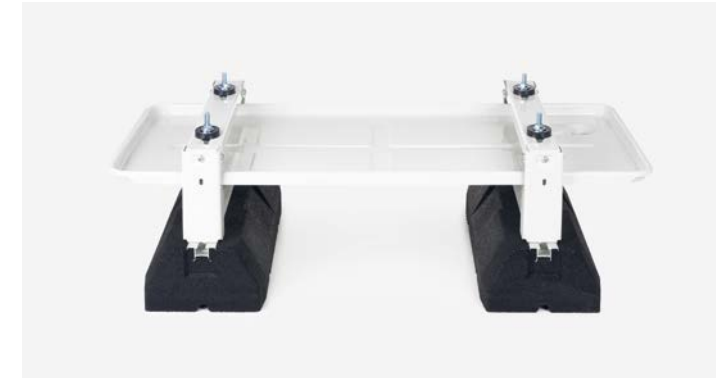

CONDENSATE DRIP TRAY

Draining pipe: diam. 20 mm



MATERIALS AND TREATMENT

Material: electro-galvanised steel
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002

BOX

Pack: nylon packaging
Pieces: 1 piece

DIMENSIONS



CONDENSATE DRIP TRAY

VS140 use with VS110
VS240 use with VS210



MATERIALS AND TREATMENT

Material: electro-galvanised steel
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002

BOX

Pack: carton box
Pieces: 1 couple

DIMENSIONS



VS140 BUNDLE VS240 BUNDLE

FLOOR SUPPORTS

- PVC
- Single
- Steel
- Modular

SUPPORTI PAVIMENTO



- PVC
- Singolo
- Lamiera
- Componibile

GENERAL DATA


Foot material: SBR recycled rubber
Profile material: aluminium
Profile dimension: 21x22mm
Fixing screw: M10x30mm
Colour: black

DIMENSIONS

RB 045-01LC



RB 060-01LC



SP 850 BLACK FLOOR SUPPORT

FLOOR SUPPORTS

- PVC
- Single
- Steel
- Modular

SUPPORTI PAVIMENTO

- PVC
- Singolo
- Lamiera
- Componibile

TECHNICAL CHARACTERISTICS

Material: galvanized steel

Colour: Ral 7016 matt

Equipped with: vibration dampers and assembling screws

Case: 1 support

Pieces per pallet: 170

Extension:


Min L= 480 mm

Max L= 830 mm


LOAD CAPACITY

Domestic use: 200 kg

DIMENSIONS AND LOADING CAPACITY

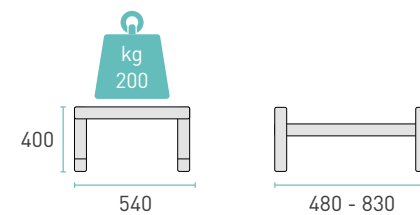


BRACKET DRILLING DIAGRAM

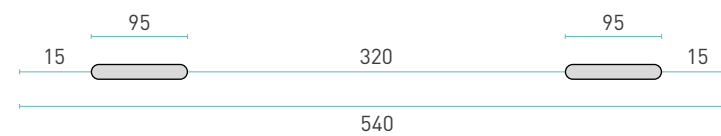

Insulating washers



AV 740
Optional foot dampers



SP 709
Optional rivet

SP 930 - SP 940 SP 960 - SP 970

FLOOR SUPPORTS

- PVC
- Single
- Steel
- Modular

SUPPORTI PAVIMENTO

- PVC
- Singolo
- Lamiera
- Componibile

TECHNICAL CHARACTERISTICS

Material: galvanized steel

Colour: Ral 9002


Equipped with: vibration dampers, assembling screws and adjustable feet

LOAD CAPACITY

Domestic use: 250 kg



DIMENSIONS AND LOADING CAPACITY

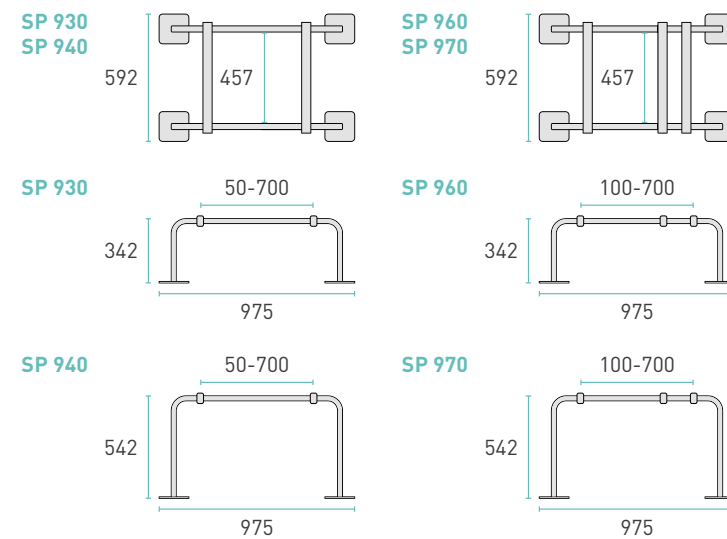

BRACKET DRILLING DIAGRAM




Insulating washers



Adjustable feet



DIMENSIONS AND LOADING CAPACITY

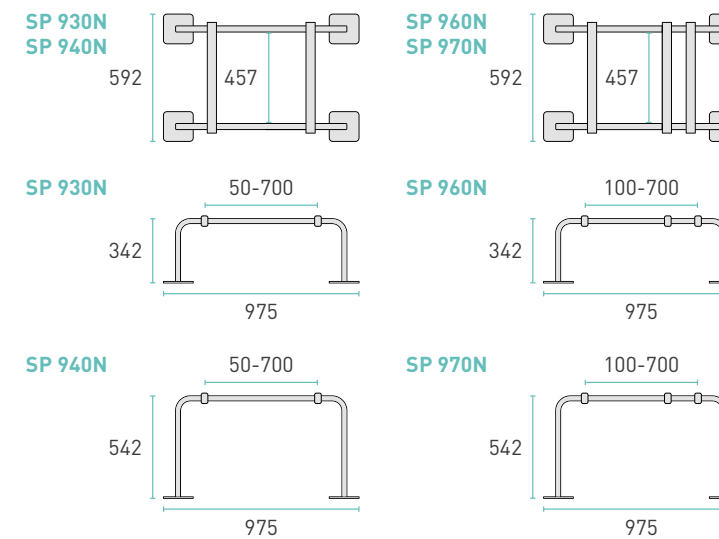

BRACKET DRILLING DIAGRAM



Insulating washers



Adjustable feet

SP 930N - SP 940N SP 960N - SP 970N

FLOOR SUPPORTS

- PVC
- Single
- Steel
- Modular

SUPPORTI PAVIMENTO

- PVC
- Singolo
- Lamiera
- Componibile

TECHNICAL CHARACTERISTICS

Material: galvanized steel

Colour: Ral 7016 matt

Equipped with: vibration dampers, assembling screws and adjustable feet

LOAD CAPACITY

Domestic use: 250 kg

DAMPERS

ANTIVIBRANTI
VIBRATION DAMPERS



Rodigas[®]
SRL 

AV 101 - AV 301 AV 201 - AV 108 AV 302 - AV 202


VIBRATION FEET DAMPERS ANTIVIBRANTI E PIEDINI

PRODUCT DESCRIPTION

Material: rubber
Hardness: 50 shore
Resistance to temperature: -40° +60° C

BOX

Pack: blister in nylon
Pack width: 4 anti-vibration pieces + bolts and nuts
Multi-pack: 50 kit
Box dimension: 40x20x20 cm

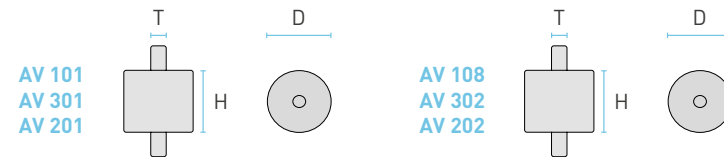

VIBRATION DAMPERS KIT DATA


CODE	DIAMTER	HEIGHT	THREAD	COMPRESSION	CUT RESISTANCE
AV 101	30 mm	20 mm	2x M 8x20	80 daN	14 daN
AV 301	40 mm	30 mm	2x M 8x20	150 daN	25 daN
AV 201	40 mm	40 mm	2x M 8x20	120 daN	25 daN
AV 401	50 mm	40 mm	2x M 10x20	230 daN	35 daN

VIBRATION FEET DAMPERS KIT DATA

CODE	DIAMTER	HEIGHT	THREAD	COMPRESSION	CUT RESISTANCE
AV 108	30 mm	20 mm	1x M 8x20	80 daN	14 daN
AV 302	40 mm	30 mm	1x M 8x20	150 daN	25 daN
AV 202	40 mm	40 mm	1x M 8x20	120 daN	25 daN
AV 402	50 mm	40 mm	1x M 10x20	230 daN	35 daN

INOX VIBRATION FEET DAMPERS

CODE	DIAMTER	HEIGHT	THREAD	COMPRESSION	CUT RESISTANCE
AV 102	30 mm	20 mm	2x M 8x20	80 daN	14 daN

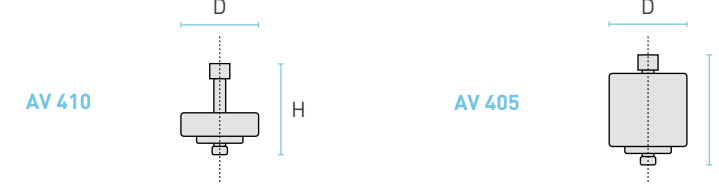

THROUGH SCREW KIT BASIC DATA

CODE	DIAMTER	HEIGHT	THREAD
AV 410	38 mm	9 mm	M8x40
AV 405	38 mm	25 mm	M8x50



AV 410 - AV 405


VIBRATION FEET DAMPERS ANTIVIBRANTI E PIEDINI

PRODUCT DESCRIPTION

Material: PVC
Hardness: 85 shore A
Resistance to temperature: -40° +60° C

BOX

Pack: blister in nylon
Pack width: 4 anti-vibration pieces + bolts and nuts
Multi-pack: 50 kit
Box dimension: 40x20x20 cm

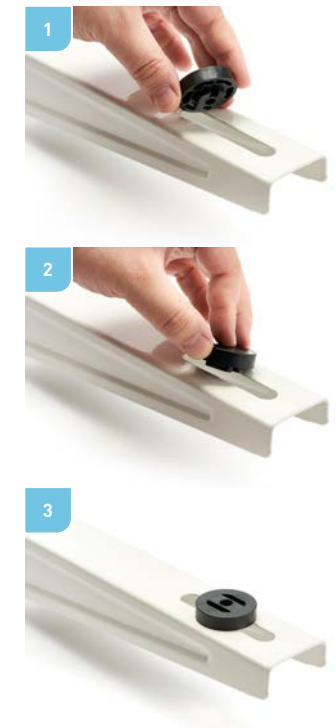

CONDENSATE

CONDENSATE DRAINAGE SET

- Embedding Box
- Trays
- Universal Fitting
- Pipes
- Pump

SCARICO CONDENSA

- Scatola
- Vaschette
- Raccordi
- Tubi
- Pompe

PB 300

CONDENSATE DRAINAGE SET

- ▶ Box
- Trays
- Universal Fitting
- Pipes
- Pump

SCARICO CONDENSA

- ▶ Scatola
- Vaschette
- Raccordi
- Tubi
- Pompe

PB 300 - EMBEDDING BOX IN PLASTIC

This embedding box is the first to be designed with a "pouch" specifically for conditioning. Thanks to its patents, it is the only box that doesn't need reinforcing crosspieces to avoid any deformation; the cover is in fact equipped with very strong small plates used for fixing of the template of the conditioner. The material of this box is able to withstand any stress caused by the installation, and the presence of the drip tray also means that the embedding box does not have to be replaced in case of damage. The optional cover from outdoor CP300 is a single body with the box, which makes it unnecessary to apply external alignment systems (as required in other types of boxes); beside it protects the inside part of box during the building works. The box was introduced in the market in 1996 and it has undergone further implementations that result in its continued success and wide diffusion.

PB 300 - SCATOLA DI PREDISPOSIZIONE IN PLASTICA

La prima scatola con marsupio studiata appositamente per il condizionamento. Grazie ai suoi brevetti, è l'unica scatola che non ha bisogno di traversini di rinforzo antideformazione, perchè il coperchio è dotato di placchette molto robuste da utilizzare nel fissaggio della dima del condizionatore. Il materiale di realizzazione è in grado di supportare qualsiasi sforzo dovuto alla messa in opera muraria ed il gocciolatoio esclude la necessità di sostituzione anche in caso di danneggiamento. Il coperchio da cantiere CP300 opzionale è un corpo unico con la scatola, che rende inutile l'applicazione di sistemi esterni di allineamento (di cui necessitano invece altri tipi di scatole) proteggendo anche l'interno scatola in fase di completamento delle opere murarie. Nel lungo utilizzo dal 1996, quando è stata immessa nel mercato, fino ad oggi, ha subito ulteriori implementazioni che ne determinano il continuo successo e larga diffusione.

INTERNAL SPACE

Fully exploitable internal space thanks to the absence of stiffening bridges, which are instead placed externally.

SPAZIO INTERNO

Interno completamente sfruttabile grazie all'assenza di ponti per rinforzo posti esteriormente.

LEVELLING SYSTEM

Optional levelling system.

SISTEMA DI LIVELLAMENTO

Sistema di livellamento opzionale.

DISCHARGE ON TWO SIDES

Tray housed inside the box with inspectable hoses.

SCARICO SU DUE LATI

Vaschetta alloggiata all'interno della scatola con manicotti ispezionabili.

SUITABLE PREDRILLED HOLES

Predrilled holes positioned to allow the universal use.

PREFORATURE IDONEE

Predisposizione all'uscita della tubazioni lateralmente o posteriormente.



Multi pipe connection
16/18/20 mm
Connessione per tubi
diametro 16/18/20mm



MULTIFUNCTIONAL COVER

This sturdy cover protects the inside of the box and the pipes during the wall plastering. The ends, once separated, are reused for fixing the indoor unit template.

COPERCHIO DA CANTIERE

Questo robusto coperchio protegge l'interno della scatola e le tubazioni durante le fasi di intonacatura e finitura delle pareti. Separando le placchette alle estremità si riutilizzano in fase di installazione per il fissaggio della dima del condizionatore.



OUTER LID

Supplied with the box, it is possible to use it before the installation of the internal unit.

COPERCHIO ESTERNO

Fornito con la scatola è possibile utilizzarlo prima dell'installazione dell'unità interna.



FIXING PLATES

It is possible to move them in different positions for fixing the installation plate.

PLACCHE DI FISSAGGIO

È possibile spostarle in posizioni diverse per fissare la piastra di installazione.

PB 300

CONDENSATE DRAINAGE SET

- ▶ Box
- Trays
- Universal Fitting
- Pipes
- Pump

SCARICO CONDENSA

- ▶ Scatola
- Vaschette
- Raccordi
- Tubi
- Pompe

MATERIALS AND TREATMENT

Case length: 540 mm

Case height: 130 mm

Case width: 65 mm

Opening dimensions: 525x80 mm

Material supplied: Finishing top cover

Available accessories: CP 300 Plastic yard cap, Box with 5 pcs

BOX

Pack: carton box

Pieces: 15

Case dimensions: 570x360x430 mm



Case weight: 12.5 kg

PALLET

Pallet dimensions: 120x80x220 cm

Couples per pallet: 300


Pallet total weight: 250 kg

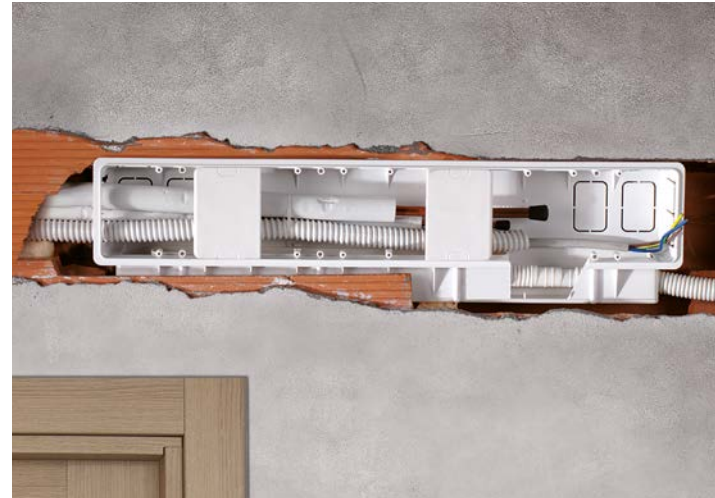

BOX WITH PS 106



CP 300

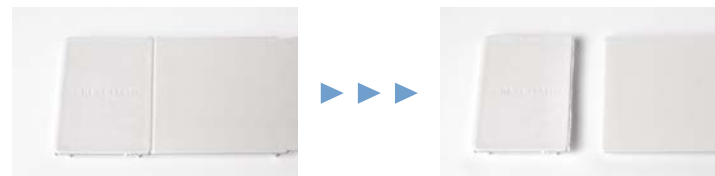

Step 1

Step 2

CP 300

MULTIFUNCTIONAL COVER

Construction site optional cover to protect the inside of the box during the wall plastering. Once protected the pipes by the cover during the wall plastering, separate the two ending parts to fix the indoor unit template.

Coperchio da cantiere opzionale per proteggere l'interno della scatola durante l'intonacatura della parete. Una volta utilizzato il coperchio per proteggere le tubazioni in fase di intonacatura della parete si separano le due estremità e si utilizzano per il fissaggio della dima dell'unità interna.



MATERIALS AND TREATMENT

Material: plastic

Colour: white

BOX

Pack: nylon packaging

Pieces: 5 pcs

CP 300 P

FIXING PLATE

Plates applicable to the box for fixing the external air conditioning unit.

Placchette applicabili alla scatola per il fissaggio della dima dell'unità esterna di condizionamento.



MATERIALS AND TREATMENT

Material: plastic

Colour: white

BOX

Pack: nylon packaging

Pieces: 30 pcs

CP 300 L

LEVELING SYSTEM

Leveling system to be applied inside the box for a quick installation.

Sistema di livellamento da applicare all'interno della scatola per una corretta installazione di intonacatura della parete si separano le due estremità e si utilizzano per il fissaggio della dima dell'unità interna.



MATERIALS AND TREATMENT

Material: plastic

Colour: yellow fluid

BOX

Pack: nylon packaging

Pieces: 1 pc


PB 400

CONDENSATE DRAINAGE SET

- ▶ Box
- Trays
- Universal Fitting
- Pipes
- Pump

SCARICO CONDENSA

- ▶ Scatola
- Vaschette
- Raccordi
- Tubi
- Pompe

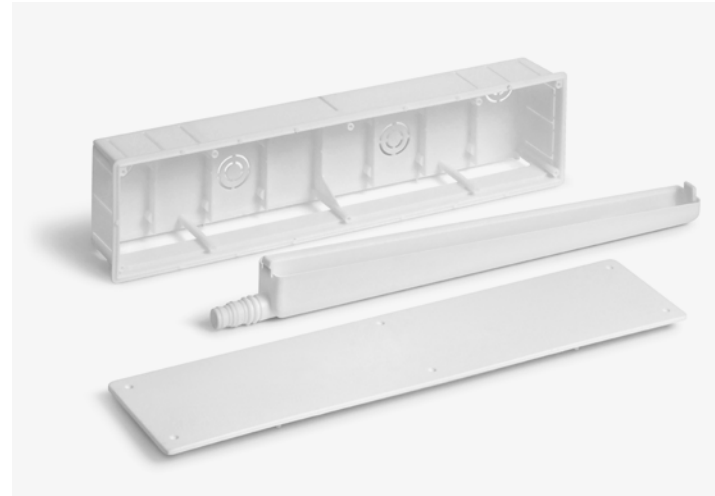


MATERIALS AND TREATMENT

Case length: 430 mm

Case height: 95 mm

Case width: 65 mm

Material supplied: Finishing top cover



BOX

Pack: carton box

Pieces: 20

Case dimensions:

PB 400 - EMBEDDING BOX IN PLASTIC

Single packed into carton box. On packaging there is one carton cover protection to be used during wall construction. Package content: plastic box, condensation tank and finiture cover.

PB 400 - SCATOLA DI PREDISPOSIZIONE

Fornita in imballo singolo con scatola di cartone. Sull'imballo è presente una protezione per le fasi di intonaco della parete. Contenuto della confezione: scatola, convogliatore di condensa e coperchio di finitura.

PALLET

Pallet dimensions: 120x80x220 cm

Pieces per pallet: 400

Pallet total weight: 250 kg



Certified quality


PB 500

CONDENSATE DRAINAGE SET

- ▶ Box
- Trays
- Universal Fitting
- Pipes
- Pump

SCARICO CONDENSA

- ▶ Scatola
- Vaschette
- Raccordi
- Tubi
- Pompe

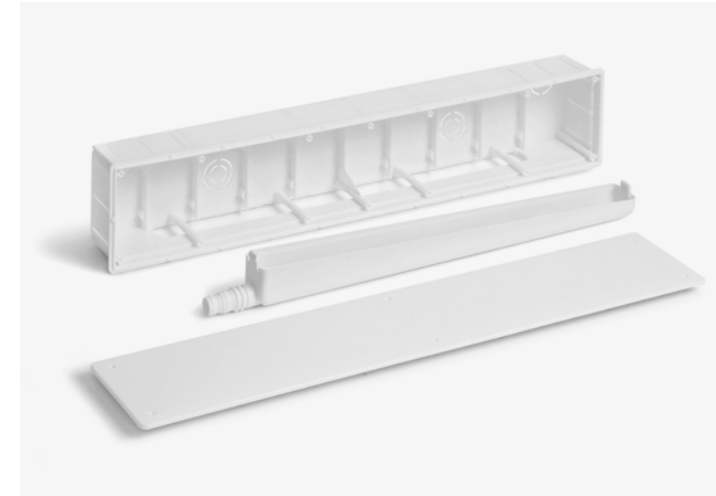


MATERIALS AND TREATMENT

Case length: 530 mm

Case height: 95 mm

Case width: 65 mm

Material supplied: Finishing top cover



PB 500 - EMBEDDING BOX IN PLASTIC

Single packed into carton box. On packaging there is one carton cover protection to be used during wall construction. Package content: plastic box, condensation tank and finiture cover.

PB 500 - SCATOLA DI PREDISPOSIZIONE

Fornita in imballo singolo con scatola di cartone. Sull'imballo è presente una protezione per le fasi di intonaco della parete. Contenuto della confezione: scatola, convogliatore di condensa e coperchio di finitura.

BOX

Pack: carton box

Pieces: 20

Case dimensions:

PALLET

Pallet dimensions: 120x80x220 cm

Pieces per pallet: 400

Pallet total weight: 250 kg



Certified quality

VS 110N VS 210N

CONDENSATE DRIP TRAY BLACK

Draining pipe: diam. 20 mm



MATERIALS AND TREATMENT

Material: electro-galvanised steel
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 7016 matt

BOX

Pack: nylon packaging
Pieces: 1 piece

DIMENSIONS



VS 120N VS 220N

CONDENSATE DRIP TRAY BLACK

VS120 use with VS110
 VS220 use with VS210
 Fixing screw included



MATERIALS AND TREATMENT

Material: electro-galvanised steel
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 7016 matt

BOX

Pack: nylon packaging
Pieces: 1 couple

DIMENSIONS



OUR CERTIFICATIONS

Certified products and processes are the best quality assurance we can offer. It is for this reason that we continuously compare ourselves with accredited institutions and professionals who guide us on our journey.



VS

CONDENSATE DRAINAGE SET

- Box
- ▶ Trays
- Universal Fitting
- Pipes
- Pump

SCARICO CONDENSA

- Scatola
- ▶ Vaschette
- Raccordi
- Tubi
- Pompe



INSTALLATION EXAMPLE

As we know, the outdoor unit of the air conditioner dripping water is not the result of a failure, but is the normal drainage of condensation caused by the exchange of hot and cold air with the radiator. These accessories, specifically developed for collecting and draining the condensate from external AC unit, help us to fix this issue.



ESEMPIO DI INSTALLAZIONE

Come sappiamo, l'unità esterna di condizionamento che gocciola acqua non è rotta ma è il normale scarico della condensa causato dallo scambio di aria calda e fredda con il radiatore. Questa gamma di accessori per la raccolta e lo scarico della condensa dell'unità di climatizzazione esterna, ci aiuta a sistemare questo inconveniente.



VS 110 VS 210



CONDENSATE DRIP TRAY

Draining pipe: diam. 20 mm



MATERIALS AND TREATMENT

Material: electro-galvanised steel
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002

BOX

Pack: nylon packaging
Pieces: 1 piece

DIMENSIONS



VS 120 VS 220



CONDENSATE DRIP TRAY

VS120 use with VS110
 VS220 use with VS210
 Fixing screw included



MATERIALS AND TREATMENT

Material: electro-galvanised steel
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002

BOX

Pack: nylon packaging
Pieces: 1 couple

DIMENSIONS



VS 140 VS 240



CONDENSATE DRIP TRAY

VS140 use with VS110
 VS240 use with VS210



MATERIALS AND TREATMENT

Material: electro-galvanised steel
Treatment: epoxy resins in polyester for outdoor
Colour: Ral 9002


BOX

Pack: carton box
Pieces: 1 couple

DIMENSIONS



VS 150 - VS 250

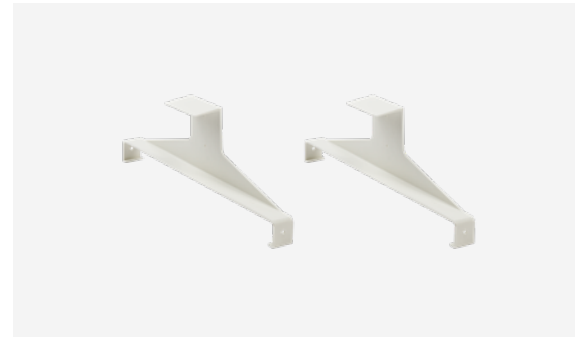

CONDENSATE DRIP TRAY

- Tray for the collection of condensation water
- Made from rigid UV-stabilized plastic, 100% rust free
- Adjustable fixation to any kind of brackets
- Embedded water outlet for Ø 16 mm, 18 mm and 20 mm to connect to standard drain pipes and hoses
- The 2 hang supports are made of glass fibre reinforced plastic and are 100% rust free
- Inside surface of the tray is slightly recessed to lead the water to the outlet

MATERIALS AND TREATMENT

Material: UV-stabilized plastic
Colour: white

BOX

Pack: nylon packaging
Pieces: 1 piece

DIMENSIONS





CONDENSATE DRIP TRAY

- The 2 hang supports are made of glass fibre reinforced plastic and are 100% rust free

MATERIALS AND TREATMENT

Material: UV-stabilized plastic
Colour: white

DIMENSIONS



RE 200




HEATING CABLE

The series heating cable CNFx is used for the protection of pipes and to prevent freezing of the equipment used in the refrigeration industry and in hydraulic networks. It is equipped with a bimetal thermostat in the version $+3^{\circ}\text{C} \pm 3^{\circ}\text{C} +8^{\circ}\text{C} \pm 3^{\circ}\text{C}$ (also available in the version $+3^{\circ}\text{C} \pm 3^{\circ}\text{C} +13^{\circ}\text{C} \pm 3^{\circ}\text{C}$), which activates the circuit only when a specific temperature is reached, thus enabling significant energy savings. It is supplied already cut to measure and ready to use: the cable length cannot be shortened by the end user.

RESISTENZA

Il cavo scaldante serie CNFx viene utilizzato per la protezione di tubi e per evitare il congelamento delle apparecchiature per la refrigerazione e reti idrauliche. È dotato di un termostato bimetallico $+3^{\circ}\text{C} \pm 3^{\circ}\text{C} +8^{\circ}\text{C} \pm 3^{\circ}\text{C}$ (disponibile anche nella versione $+3^{\circ}\text{C} \pm 3^{\circ}\text{C} +13^{\circ}\text{C} \pm 3^{\circ}\text{C}$) che attiva il circuito solamente in presenza di una data temperatura, tale da permettere un notevole risparmio energetico. Viene fornito già tagliato a misura e pronto all'uso: la lunghezza del cavo non può essere accorciata dall'utilizzatore finale.

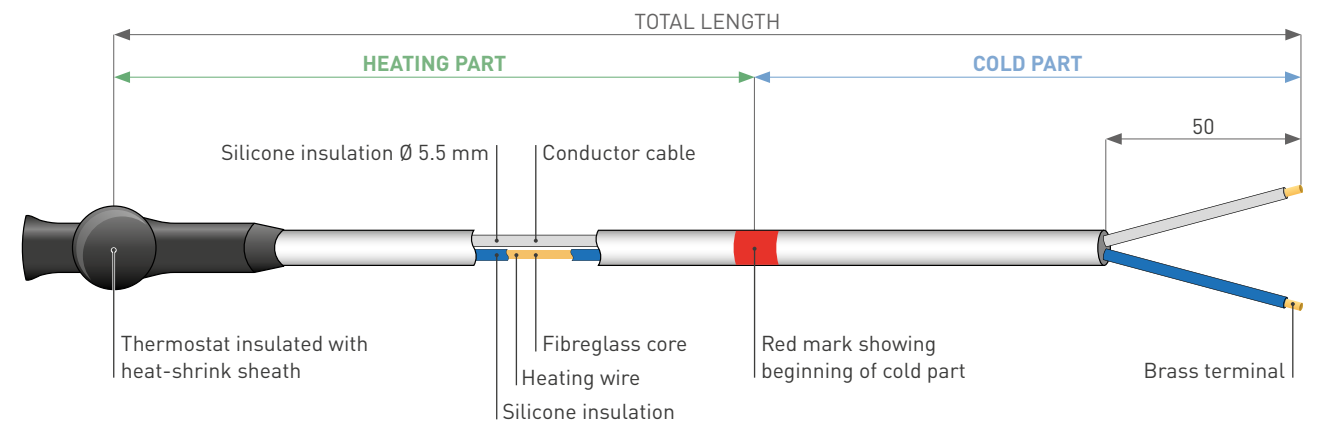

CODE	SUPPLY VOLTAGE	HEATING PART MM	COLD PART MM	TOTAL LENGTH
RE 200	220/240	1000	1000	2 mt
RE 300	220/240	2000	1000	3 mt
RE 400	220/240	3000	1000	4 mt
RE 600	220/240	5000	1000	6 mt

Y 1616



**CONNECTION FOR
CONDENSATE
DRAINING PIPE**

GENERAL DATA

Input diameter: 16
Output diameter: 16
UVA resistant
Resistant to: -20°C / +40°C

BOX

Pack: nylon packaging
Pieces per blister: 10
Blister per case: 10

Y 1620



**CONNECTION FOR
CONDENSATE
DRAINING PIPE**

GENERAL DATA

Input diameter: 16
Output diameter: 20
UVA resistant
Resistant to: -20°C / +40°C

BOX

Pack: nylon packaging
Pieces per blister: 10
Blister per case: 10

Y 2020



**CONNECTION FOR CONDENSATE
DRAINING PIPE**

GENERAL DATA

Input diameter: 20
Output diameter: 20
UVA resistant
Resistant to: -20°C / +40°C

BOX

Pack: nylon packaging
Pieces per blister: 10
Blister per case: 10

Y 105



**CONNECTION FOR CONDENSATE
DRAINING PIPE**

GENERAL DATA

Input diameter: 16/18/20
Output diameter: 16/18/20
UVA resistant
Resistant to: -20°C / +40°C
Available accessories:
TSM 68/80 Metric drainage hose
TU 16/18/20 Drainage hose

BOX

Pack: Nylon blister
Pieces per blister: 10
Blister per case: 10
Case dimension: 250×350×150
Pack average weight: 2 kg

TU



**SPIRALATED PIPE
SMOOTH INSIDE**

GENERAL DATA

Smooth inside
Resistant to: -20°C / +40°C
(lab tests, no changes after
72 hours)
Available accessories:
Y 105 Y universal pipe fitting
Y 1616 pipe fitting
Y 1620 pipe fitting
Y 2020 pipe fitting

BOX

Pack: roll
Meters: 30
Roll average dimension:
400×400×200 mm
Pack average weight: 2.3 kg

PALLET

Pallet dimensions:
120×80×100 cm
Rolls per pallet: 30
Total pallet weight: 100 kg

TSM



**CORRUGATED PIPE
WITH CONNECTION**

GENERAL DATA

Corrugated drain pipe
Resistant to: -10°C / +40°C
Available accessories:
Y 105 Y universal pipe fitting

BOX

Pack: carton box
Meters: 50
Pack dimension:
400×400×200 mm

PALLET

Pallet dimensions:
120×80×100 cm
Rolls per pallet: 24
Total pallet weight: 100 kg

TS 20 TR



RIGID DRAIN PIPE

GENERAL DATA

Rigid drain condensate pipe is an alternative solution to common flexible spiralated or corrugated pipes and warranty an high U.V. rays resistant and weight pressure resistance.

It could be installed on wall or inside wall and thanks to its accessories to connect and derivate could be quickly installed to all condition.

Diameter: 20 mm

Lenght: 2 meter

BOX

Pack: carton box

Meters: 70

Pieces per pack: 35 bars

TS 20 MOR



CONNECTOR

GENERAL DATA

Connector for rigid drain condensate pipe used to connect two pipe with O'ring.

BOX

Pack: carton box

Pieces per pack: 20 pcs

TS 20 DOR



"T" DERIVATION

GENERAL DATA

"T" derivation for rigid drain condensate pipe used to connect three pipes with O'ring.

BOX

Pack: carton box

Pieces per pack: 20 pcs

TS 20 COR



90° CORNER

GENERAL DATA

90° corner for rigid drain condensate pipe used to connect two pipes with a corner of 90° with O'ring.

BOX

Pack: carton box

Pieces per pack: 20 pcs

TS 20 AOR



135° CORNER

GENERAL DATA

135° corner for rigid drain condensate pipe used to connect two pipes with a corner of 135° with O'ring.

BOX

Pack: carton box

Pieces per pack: 20 pcs

TS 20 RU



CONNECTOR

GENERAL DATA

Unique connector from rigid pipe to spiralated/flexible pipe Ø 14-16-18-20 mm.

BOX

Pack: carton box

Pieces per pack: 20 pcs

TS 20 CF



PIPE HOLDER CLIPS

GENERAL DATA

Rigid self extinguishing PVC material VO.

BOX

Pack: carton box

Pieces per pack: 20 pcs

TS 16 RU



CONDENSATION CONNECTION SOFT-RIGID PIPE

GENERAL DATA

Rigid pipe: Ø 16 mm
Flexible pipe: Ø 14-16-18-20 mm

BOX

Pack: carton box
Pieces per pack: 20 pcs

TS 18 RU



CONDENSATION CONNECTION SOFT-RIGID PIPE

GENERAL DATA

Rigid pipe: Ø 18 mm
Flexible pipe: Ø 14-16-18-20 mm

BOX

Pack: carton box
Pieces per pack: 20 pcs

TS 25 RU



CONDENSATION CONNECTION SOFT-RIGID PIPE

GENERAL DATA

Rigid pipe: Ø 25 mm
Flexible pipe: Ø 14-16-18-20 mm

BOX

Pack: carton box
Pieces per pack: 20 pcs

TS 32 RU



CONDENSATION CONNECTION SOFT-RIGID PIPE

GENERAL DATA

Rigid pipe: Ø 32 mm
Flexible pipe: Ø 14-16-18-20 mm

BOX

Pack: carton box
Pieces per pack: 20 pcs

Y 106



SIPHONE

GENERAL DATA

The siphon is designed to prevent the return of bad odors from the drain condensate pipe. Simple and functional, it can be easily connected to all drain pipes. Made of transparent rigid PVC to allow rapid inspection. Thanks to its small dimensions it can be placed also inside trunkings.

Il sifone è stato realizzato per evitare il ritorno dei cattivi odori provenienti dal tubo di scarico condensa. Semplice e funzionale, può essere agevolmente collegato a tutti i tubi di scarico. In PVC rigido trasparente per consentirne rapida ispezione. Grazie alle sue contenute dimensioni può essere collocato anche in canalina.

BOX

Pack: carton box
Pieces per pack: 10 pcs

Y 107



INSPECTABLE CONDENSATION WATER SIPHON

GENERAL DATA

Avoids bad smells!
Can be installed vertically and horizontally.
Various connection combinations possible.
Inspectable.

Input pipe connection: Ø 20 mm
Output pipe connection: Ø 16-18 mm

BOX

Pack: carton box
Pieces per pack: 20 pcs



VERTICAL INSTALLATION



HORIZONTAL INSTALLATION

DUCTS

DUCTS
CANALINE

Rodigas[®]
SRL 

BM



Code: BM 60/80/110 - BC 60/80/110

Description: trunking base with lid of 2 m bars

Material: VO self-extinguishing PVC

Operating temperature: -20° +60° C


Pack size:

BM/BC 60 - 24 m
BM/BC 80 - 16 m
BM/BC 110 - 8 m

BC



DIMENSIONS



TYPE	D	H
BM/BC 60	60	45
BM/BC 80	80	60
BM/BC 110	110	75

GF



Code: GF 60 - GF 80

Description: flexible joint

Material: VO self-extinguishing PVC

Operating temperature: -20° +60° C

Pack size: GF 60 - 6 pcs, GF 80 - 4 pcs

CM



Code: CM 60 - CM 80 - CM 110

Description: wall curve

Material: VO self-extinguishing PVC

Operating temperature: -20° +60° C

Pack size: CM 60 - 9 pcs, CM 80 - 6 pcs, CM 110 - 4 pcs

TT



Code: TT 60 - TT 80

Description: terminal plug

Material: VO self-extinguishing PVC

Operating temperature: -20° +60° C

Pack size: TT 60 - 12 pcs, TT 80 - 9 pcs

PM



Code: PM 60 - PM 80

Description: wall passage

Material: VO self-extinguishing PVC

Operating temperature: -20° +60° C

Pack size: PM 60 - 10 pcs, PM 80 - 16 pcs

CP



Code: CP 60 - CP 80 - CP 110

Description: flat curve

Material: VO self-extinguishing PVC

Operating temperature: -20° +60° C

Pack size: CP 60 - 10 pcs, CP 80 - 8 pcs, CP 110 - 6 pcs

DT



Code: DT 80 - DT 110

Description: T diversion

Material: VO self-extinguishing PVC

Operating temperature: -20° +60° C

Pack size: DT 80 - 1 pc, DT 110 - 4 pcs

AI



Code: AI 60 - AI 80 - AI 110

Description: 90° internal angle

Material: VO self-extinguishing PVC

Operating temperature: -20° +60° C

Pack size: AI 60 - 8 pcs, AI 80 - 6 pcs, AI 110 - 4 pcs

AE



Code: AE 60 - AE 80 - AE 110

Description: 90° external angle

Material: VO self-extinguishing PVC

Operating temperature: -20° +60° C

Pack size: AE 60 - 12 pcs, AE 80 - 9 pcs, AE 110 - 6 pcs

RI



Code: RI 60 - RI 80

Description: reduction

Material: VO self-extinguishing PVC

Operating temperature: -20° +60° C

Pack size: RI 60 - 12 pcs, RI 80 - 8 pcs

ST



Code: ST 60 - ST 80 - ST 110

Description: pipe fixing brackets

Material: VO self-extinguishing PVC

Operating temperature: -20° +60° C

Pack size: ST 60 - 30 pcs, ST 80 - 30 pcs, ST 110 - 20 pcs

GC



Code: GC 60 - GC 80 - GC 110

Description: lid joint

Material: VO self-extinguishing PVC

Operating temperature: -20° +60° C

Pack size: GC 60 - 30 pcs, GC 80 - 30 pcs, GC 110 - 20 pcs

VS



Code: VS 60-80
Description: left vertical angle
Material: VO self-extinguishing PVC
Operating temperature: -20° +60° C
Pack size: 4 pcs

VD



Code: VD 60-80
Description: right vertical angle
Material: VO self-extinguishing PVC
Operating temperature: -20° +60° C
Pack size: 4 pcs

IR



Code: IR 60-80
Description: adjustable internal angle 80°-105°
Material: VO self-extinguishing PVC
Operating temperature: -20° +60° C
Pack size: 4 pcs

RC30



Code: RC30
Description: reduced connection
Material: VO self-extinguishing PVC
Operating temperature: -20° +60° C
Pack size: 20 pcs

TT30



Code: TT30
Description: terminal plug
Material: VO self-extinguishing PVC
Operating temperature: -20° +60° C
Pack size: 20 pcs

AE30



Code: AE30
Description: 90° external angle
Material: VO self-extinguishing PVC
Operating temperature: -20° +60° C
Pack size: 20 pcs

PR



Code: PR 60-80
Description: adjustable plane curve 65°-130°
Pack size: 6 pcs

ER



Code: ER 60-80
Description: adjustable external angle 70°-120°
Pack size: 8 pcs

BC30



Code: BC30
Description: trunking with enveloping top of 2 m bars
Material: VO self-extinguishing PVC
Operating temperature: -20° +60° C
Pack size: 64 m

CP30



Code: CP30
Description: flat curve
Material: VO self-extinguishing PVC
Operating temperature: -20° +60° C
Pack size: 20 pcs

AI30



Code: AI30
Description: 90° internal angle
Material: VO self-extinguishing PVC
Operating temperature: -20° +60° C
Pack size: 20 pcs

GC30



Code: GC30
Description: lid joint
Material: VO self-extinguishing PVC
Operating temperature: -20° +60° C
Pack size: 20 pcs

OTHER PRODUCTS

OTHER PRODUCTS
ALTRI PRODOTTI

Rodigas[®]
BRL

OUTDOOR UNITS GUARDS

MATERIALS AND TREATMENT

Colour: outdoor epoxy resin in ral 9002
Material: electro galvanized steel
 outdoor epoxy resin

ACCESSORIES

available on request backside door and
 condensing tray



Right side
 keylock included in the kit door for inspection
 and cleaning

EXTERNAL DIMENSION			
CODE	HEIGHT (mm)	WIDTH (mm)	DEPTH (mm)
MA101	800	1000	500
MA102	900	1000	600
MA103	1000	1200	600
MA104	1200	1200	600
MA105	1400	1200	650
MA106	1600	1200	650

INTERNAL DIMENSION			
CODE	HEIGHT (mm)	WIDTH (mm)	DEPTH (mm)
MA101	790	930	480
MA102	890	930	580
MA103	990	1130	580
MA104	1190	1130	580
MA105	1390	1130	630
MA106	1590	1130	630



SNOW COVER

Made in electro-galvanized and painted steel for the protection of external air conditioning units from snow and rain. It can be used on different types of machinery, it is supplied in assembly kit. On the upper part, there are pre-perforations to allow the possible passage of the pipes.

SNOW COVER

Realizzata in acciaio elettrozincato e verniciato per la protezione delle unità esterne di condizionamento dalla neve e pioggia utilizzabile su diverse tipologie di macchinari, viene fornita in kit di montaggio. Sulla parte superiore, sono presenti delle pre-forature per permettere l'eventuale passaggio delle tubazioni.

MA 401 SNOW COVER

MATERIALS AND TREATMENT

Colour: outdoor epoxy resin in ral 9002
Material: electro galvanized steel
 outdoor epoxy resin

DIMENSIONS

Cover length: 1100 mm
Cover width: 560 mm



Bracket details
 Pre-drilled hole on the top for pipe
 connection

FS 400

FIXING KIT FOR DUCT



GENERAL DATA

Screw size: M5x35 self-tapping
Diameter: 12 mm crosshead
Block size: M6x30

BOX

Pack: thermoformed blister
Pieces: 300+300
Blister dimension: 250x210x40 mm

FS 401

FIXING KIT FOR SUPPORTS



GENERAL DATA

Screw size: M8x80 galvanized hexagonal head lag screw
Block size: M12x70
Washer size: M8x20

BOX

Pack: nylon blister
Pieces per pack: 4+4+4

FS 300

FIXING KIT FOR CHEMICAL ANCHORING



GENERAL DATA

Screw size: threaded bar M8x120 + bolts and nuts
Block size: M8x80

BOX

Pack: nylon blister
Pieces: 4 series

FS 800

FIXING KIT FOR INSULATING LAYER



DESCRIPTION

Fixing kit for the insulating layer. This practical kit is suitable for the installation of the brackets of the standards sliding and sliding lines on the buildings covered with insulating coats.

Kit di fissaggio per lo strato isolante. Questo pratico kit è adatto per l'installazione delle staffe delle linee scorrevoli e scorrevoli standard sugli edifici coperti con strati isolanti.

TECHNICAL CHARACTERISTICS

Srew: galvanized threaded rod 330x8mm
Spacer: 50x2mm in PVC
Accessories: PP washer and components

BOX

Pack: nylon blister
Pieces: 4 series + 2 foets

FA 101 - FA 102

ADHESIVE INSULATING BAND



TECHNICAL CHARACTERISTICS

FA 101 colour: black
FA 102 colour: white
Classification of reaction to fire: Class 1
Coefficient of thermal conductivity at 0°C: λ 0,034
Steam diffusion resistance coefficient: μ 11.268
Operating temperature: -40°C a +105°C
Thickness: 3 mm
Width: 50 mm
Length: 10 m

BOX

Single packaging in transparent cellophane envelope
Carton pack: 43x43x21 cm
Pack content: 24 rolls

CPR

TAPS COVER



DESCRIPTION

Universal tap covers for outdoor units. Designed to reduce the formation of condensation on the outside of the taps when using the air conditioner.

Very practical during maintenance thanks to the quick Velcro closure.

DESCRIZIONE

Coprirubinetti universali per unità esterne. Studiati per ridurre il formarsi di condensa nella parte esterna dei rubinetti durante l'uso del condizionatore.

Molto pratici in fase di manutenzione grazie all chiusura rapida in velcro.

TECHNICAL CHARACTERISTICS

Material: foam

Colour: beige

BOX

Pack: blister in nylon

Pieces per blister: 10 Pcs

Multi-pack: carton box

Blister per case: 100 Pcs

CT

PROTECTIVE COVER FOR EXTERNAL AIR-CONDITIONING UNITS WHEN NOT OPERATING



DESCRIPTION

This hood protects the external unit of the air conditioner from atmospheric agents during times of inactivity, representing the ideal solution in case of prolonged periods of absence.

DESCRIZIONE

Questa cappottina protegge l'unità esterna del condizionatore dagli agenti atmosferici durante i momenti di inutilizzo rappresentando la soluzione ideale in caso di prolungati periodi di assenza.

TECHNICAL CHARACTERISTICS

Calendered self-extinguishing PVC with 220.0 micron thickness.

UV-resistant gray fabric.

Fully sewn and strengthened in the internal seams


Sling in fabric for lateral closure "tube entry".

Gray polyester closing cable diam. 0.2mm.

Anti-condensation ventilation system.

CODE	HEIGHT	WIDTH	DEPTH
CT 001	55 cm	70 cm	30 cm
CT 002	60 cm	80 cm	30 cm
CT 003	70 cm	86 cm	36 cm
CT 004	85 cm	95 cm	40 cm

EB 101 LINE SET BENDER

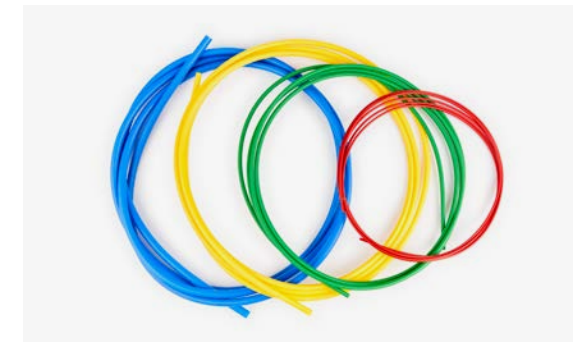

DESCRIPTION

The tool that you need to bend linesets when installing split systems.

Easiest way to bend twin tubes without damaging their insulation.

Reusable after cleaning!

No need for springs or heavy equipment!

Only for soft copper.

BOX

Pack: nylon blister

Pieces: 1 set contains the 4 different colours

Box: 1 box contains 10 sets

EB 101	Diameter	Fits tube	Length
Red	4 mm	1/4"	4 m
Green	6 mm	3/8"	4 m
Yellow	9 mm	1/2"	4 m
Blue	12 mm	5/8"	4 m

EB 201 LINE SET BENDER



DESCRIPTION

The tool that you need to bend linesets when installing split systems.

Easiest way to bend twin tubes without damaging their insulation.

Reusable after cleaning!

No need for springs or heavy equipment!

Only for soft copper.

BOX

Pack: nylon blister

Pieces: 1 piece

Box: 1 box contains 10 pieces

EB 201	Diameter	Fits tube	Length
White	16 mm	3/4"	4 m

ALUMINIUM ROOF INLET

DESCRIPTION

These accessories are designed to protect from bad weather the holes drilled in the roofs for the routing of the copper pipes connecting the outdoor and indoor units.

High thermal stability.

Good chemical resistance.

Excellent resistance to weathering and ageing.

Assembly with stainless steel screw (supplied).

Plastic pipe anti-cutting system.

Questi accessori, si utilizzano per proteggere dalle intemperie i fori realizzati sulle coperture per passare con le tubazioni in rame che collegano l'unità esterne a quelle interne.

Elevata stabilità termica.

Eccellente resistenza agli agenti atmosferici e all'invecchiamento.

Montaggio mediante vite in acciaio inossidabile (in dotazione).


Sistema di anti taglio delle tubazioni in plastica.

GENERAL DATA

Material: Aluminium
Colour: Ral 9002 - Ral 7016 matt
Pack: carton box
Pieces: 1 piece




DIMENSIONS AND LOADING CAPACITY

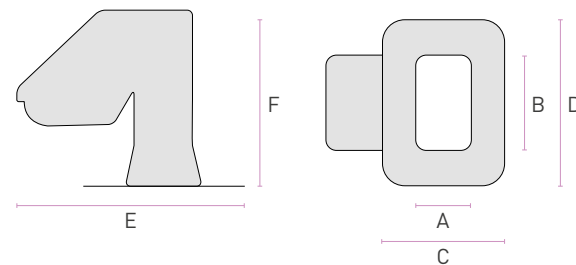

MODEL	UT100	UT200	UT400
Material	Aluminium	Aluminium	Aluminium
Inside dimensions: AxB	80x80 mm	125x125 mm	125x250 mm
Outside dimensions: CxD	260x260 mm	360x360 mm	360x490 mm
Outside dimensions: ExF	290x240 mm	520x465 mm	520x465 mm
MOQ Packing	1 pc	1 pc	1 pc
Pallet	30 pcs	30 pcs	30 pcs



DIMENSIONS AND LOADING CAPACITY

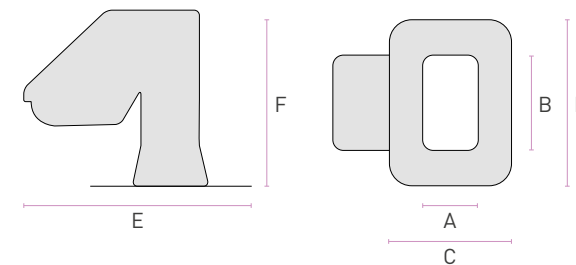

MODEL	UT300	UT500
Material	Pvc	Pvc
Inside dimensions: AxB	125x125 mm	125x250 mm
Outside dimensions: CxD	360x360 mm	360x490 mm
Outside dimensions: ExF	522x420 mm	522x420 mm
MOQ Packing	1 pc	1 pc
Pallet	30 pcs	32 pcs

PLASTIC ROOF INLET

DESCRIPTION

These accessories are designed to protect from bad weather the holes drilled in the roofs for the routing of the copper pipes connecting the outdoor and indoor units.

High thermal stability.

Good chemical resistance.

Excellent resistance to weathering and ageing.

Assembly with stainless steel screw (supplied).

Plastic pipe anti-cutting system.

Questi accessori, si utilizzano per proteggere dalle intemperie i fori realizzati sulle coperture per passare con le tubazioni in rame che collegano l'unità esterne a quelle interne.

Elevata stabilità termica.

Eccellente resistenza agli agenti atmosferici e all'invecchiamento.

Montaggio mediante vite in acciaio inossidabile (in dotazione).

Sistema di anti taglio delle tubazioni in plastica.

GENERAL DATA


Material: UV-stabilized plastic
Colour: Ral 9002
Pack: carton box
Pieces: 1 piece



FRAME FOOT™
SUPPORT

FRAME FOOT™

Rodigas®
BRL

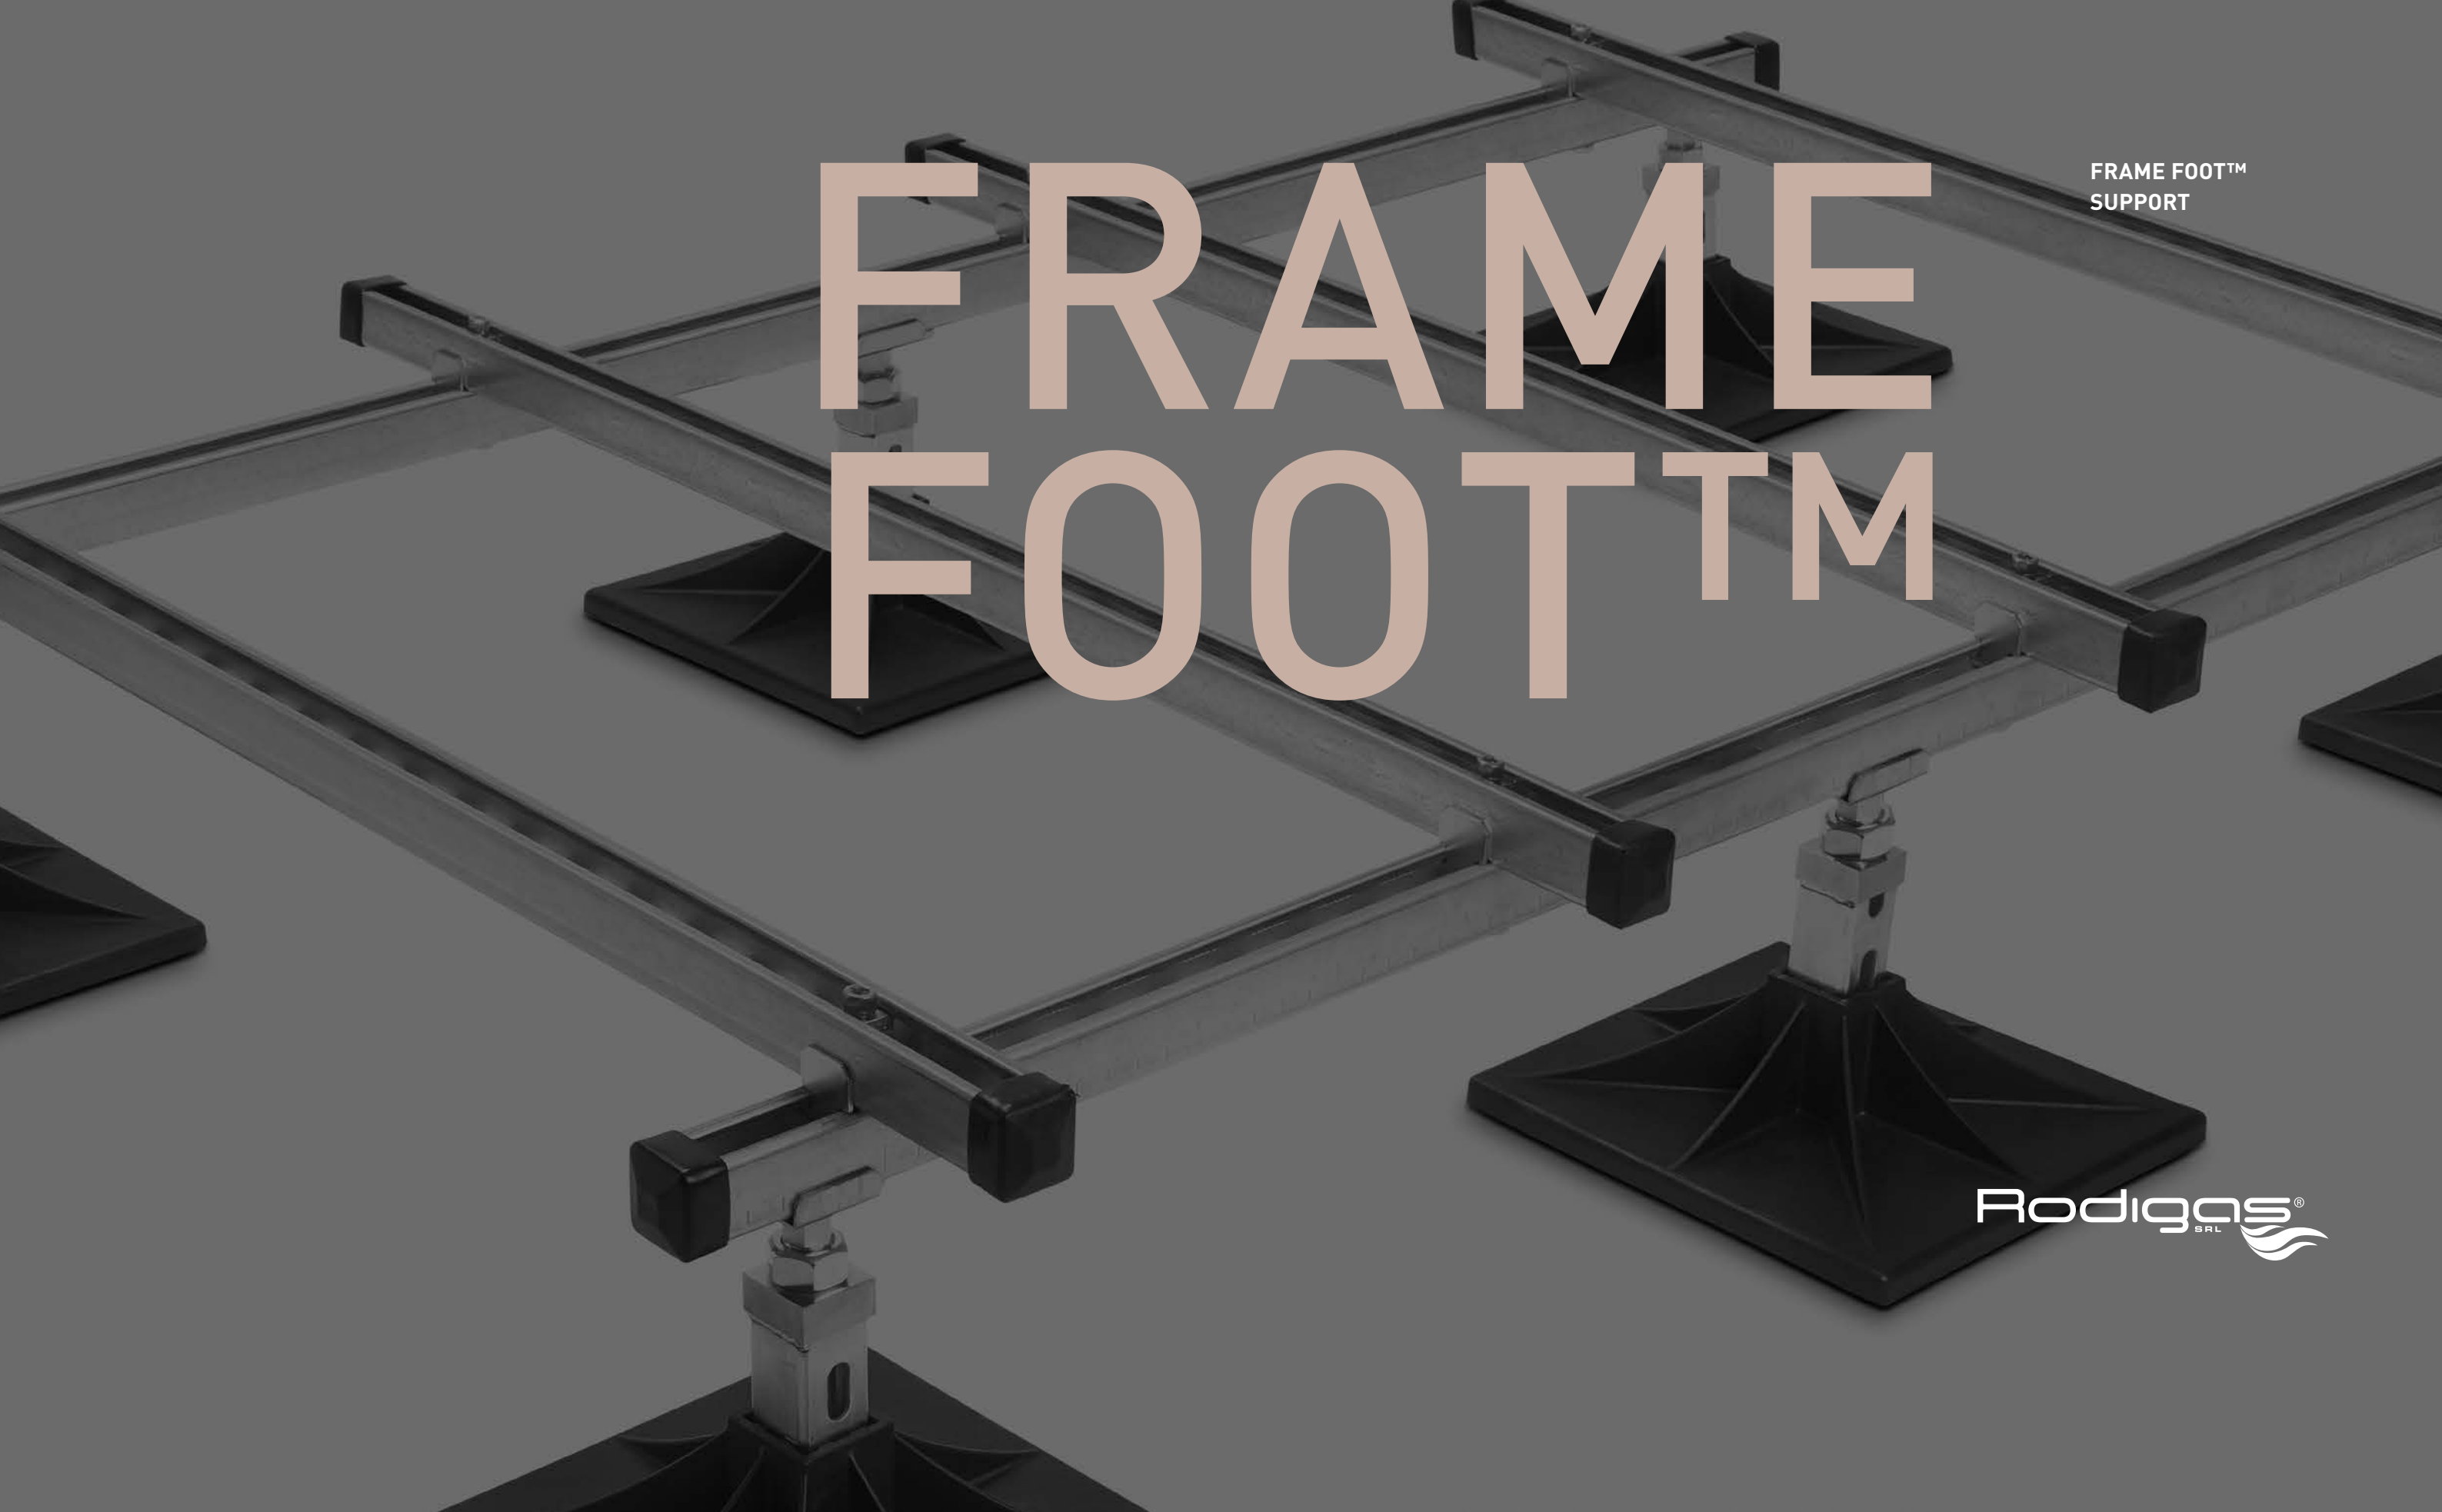

FT 200

FRAME FOOT™ SUPPORT

DESCRIPTION

Heavy-duty supporting system for use on flat or sloped (optional) surfaces.

STEEL FRAME


Manufactured from galvanised strut channels.
All steel connections, screws and clamps are galvanised.
Plastic end caps included.
Height-adjustable from 295 mm up to 415 mm with M24 screw.
Option from 745 mm to 865 mm.
Easily adjustable, even after installation.
Handy moveable bracket for 90° mounting channels.
Special dimensions available on request.

PLASTIC FOOT

High-impact composite material: composite plastics
Equipped with anti-vibration mat
UV-resistant
Standard colour: black
Working temperature: -40°C to +80°C
Max. load per foot: 240 kg

GENERAL DATA


Frame dimensions: 1000x1200 mm
Foot dimensions: 300x300 mm
Max load capacity*: 500 kg
Max spreaded load capacity*: 500 kg / m²

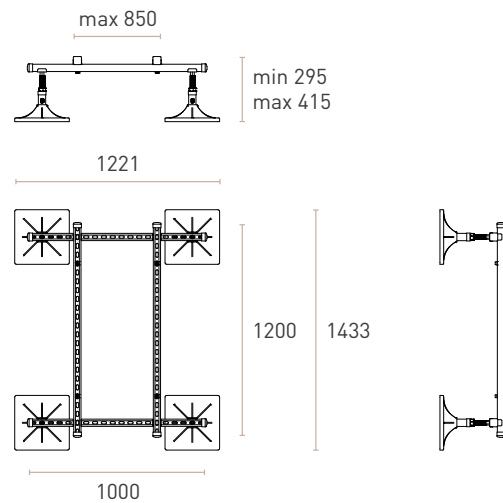

EASY REGULATION



QUICK ASSEMBLING

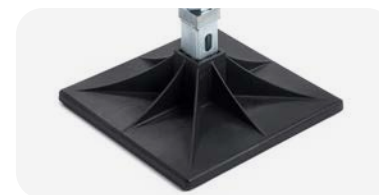

FEET + ANTIVIBRATION MATS

FT 300

FRAME FOOT™ SUPPORT

DESCRIPTION

Heavy-duty supporting system for use on flat or sloped (optional) surfaces.
Height-adjustable from 295 mm to 415 mm (even after installation).

STEEL FRAME


Manufactured from galvanised strut channels.
All steel connections, screws and clamps are galvanised.
Plastic end caps included.
Height-adjustable from 295 mm up to 415 mm with M24 screw.
Option from 745 mm to 865 mm.
Easily adjustable, even after installation.
Handy moveable bracket for 90° mounting channels.
Special dimensions available on request.

PLASTIC FOOT

High-impact composite material: composite plastics
Equipped with anti-vibration mat
UV-resistant
Standard colour: black
Working temperature: -40°C to +80°C
Max. load per foot: 240 kg

GENERAL DATA

Frame dimensions: 2221x1433 mm
Foot dimensions: 300x300 mm
Max load capacity*: 1040 kg
Max spreaded load capacity*: 500 kg / m²

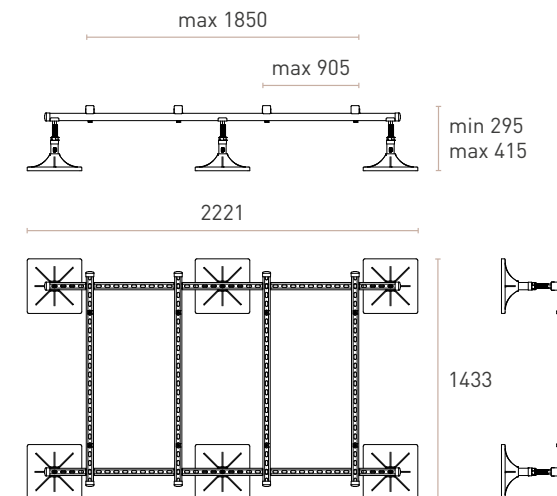

SURFACE LOAD TABLE - FOOT SURFACE 300x300 mm*

Load per foot - kg/pc	10	20	30	40	50	60	70	80	90	100	110	120
Load per foot - kN/m ² on the ground / flats roofs	1,90	2,18	3,27	4,36	5,45	6,54	7,63	8,72	9,81	10,90	11,99	13,08



Certified quality



Certified quality

FT 400

FRAME FOOT™ SUPPORT

DESCRIPTION

Heavy-duty supporting system for use on flat or sloped (optional) surfaces.

STEEL FRAME


Manufactured from galvanised strut channels.
 All steel connections, screws and clamps are galvanised.
 Plastic end caps included.
 Height-adjustable from 295 mm up to 415 mm with M24 screw.
 Option from 745 mm to 865 mm.
 Easily adjustable, even after installation.
 Handy moveable bracket for 90° mounting channels.
 Special dimensions available on request.

PLASTIC FOOT

High-impact composite material: composite plastics
 Equipped with anti-vibration mat
 UV-resistant
 Standard colour: black
 Working temperature: -40°C to +80°C
 Max. load per foot: 240 kg

GENERAL DATA


Frame dimensions: 3000x1200 mm
Foot dimensions: 300x300 mm
Max load capacity*: 1620 kg
Max spreaded load capacity*: 500 kg / m²

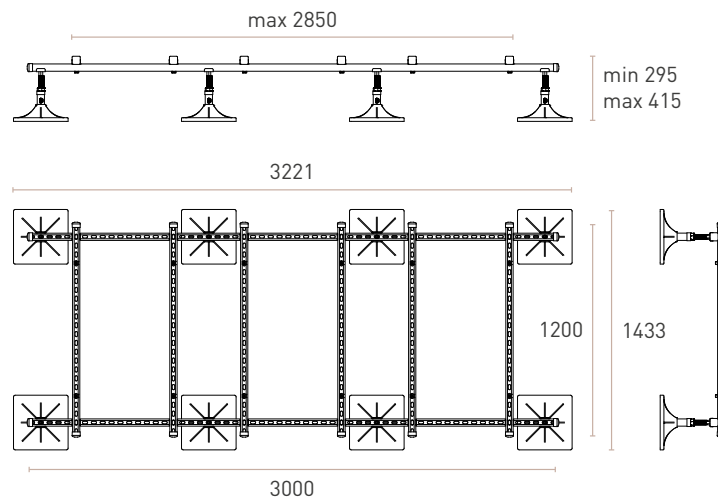

EASY REGULATION



QUICK ASSEMBLING

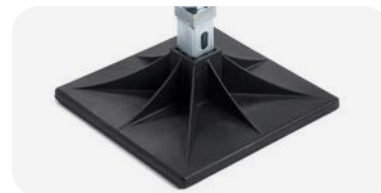

FEET + ANTIVIBRATION MATS



Certified quality

FT 500 EXTENSION MODULE




DESCRIPTION

Extension module for FT 200, FT 300, FT 400.
 Height-adjustable from 295 mm to 415 mm.
 Channels connector included.

GENERAL DATA

Frame dimensions: 1111x1433 mm
Foot dimensions: 300x300 mm
Max load capacity*: 500 kg
Max spreaded load capacity*: 500 kg/m²

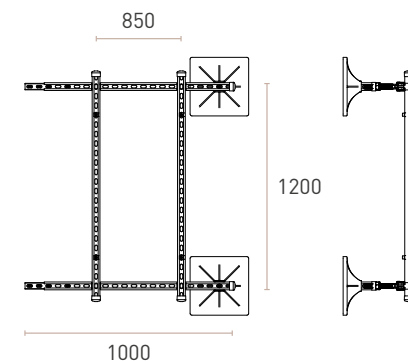

* The maximum load / spread load capacity is expressed without taking into account any safety parameter or factor. It is the customer's responsibility to choose and use appropriate tools and fixing materials which ensure that the final installation is in compliance with all national, state, local and environmental regulations. Check the safety parameters that are appropriate for your intended use and contact us if necessary.



Certified quality

FT 100 AIR DUCTS SUPPORT




DESCRIPTION

H-frame to support air ducts.
 Easily adjustable, even after installation.
 Galvanized steel elements based on common struts channels.
 Other dimensions available on request.

GENERAL DATA

Dimensions: 952x625x310 mm
Height-adjustable: from 240 mm to 600 mm
Foot dimensions: 300x300 mm
Max load capacity*: 480 kg
Max spreaded load capacity*: 500 kg/m²

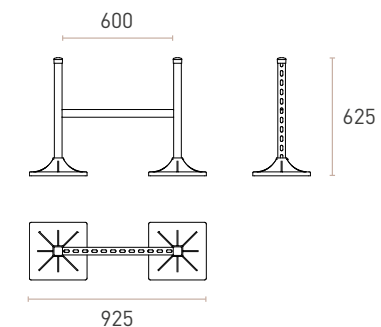

Certified quality

SUMO SUPPORTS 21mm PROFILE

DESCRIPTION

Rubber floor supports guarantee a practical versatile and environmentally friendly solution. Supports are made of black SBR recycled rubber which guarantees high vibrations damping and durability. External unit, or other utilities, can be fixed through aluminum channel embedded in the support itself. The support is also provided with provision for ground fixing and is supplied with screws.

I supporti a pavimento in gomma nera garantiscono una soluzione pratica, versatile ed attenta all'ambiente. I supporti sono infatti realizzati con gomma riciclata SBR che garantisce un'elevata riduzione delle vibrazioni e durata nel tempo. Il fissaggio della motocondensante (o eventuali altre utenze) è garantito dal profilo di alluminio annegato nel supporto stesso. Il supporto viene fornito completo di viteria.

GENERAL DATA


Foot material: SBR recycled rubber
Profile material: aluminium
Profile dimension: 21x12 mm
Fixing screw: M10x30 mm
Colour: black




Other products available on the dedicated catalog.




DIMENSIONS AND LOADING CAPACITY

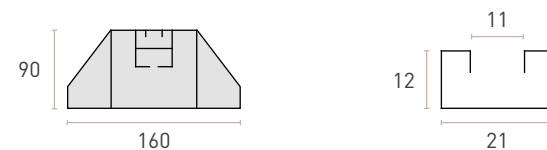

RB 025-01




RB 045-01LC



RB 060-01LC



RB 100-01LC



Code	Dimensions	Length	Load capacity
RB 025-01	160x90 mm	250 mm	160 Kg
RB 045-01LC	160x90 mm	450 mm	180 Kg
RB 060-01LC	160x90 mm	600 mm	200 Kg
RB 100-01LC	160x90 mm	1000 mm	220 Kg

SUMO SUPPORTS 41mm PROFILE

DESCRIPTION

Rubber floor supports guarantee a practical versatile and environmentally friendly solution. Supports are made of black SBR recycled rubber which guarantees high vibrations damping and durability. External unit, or other utilities, can be fixed through aluminum channel embedded in the support itself. The support is also provided with provision for ground fixing and is supplied with screws.


I supporti a pavimento in gomma nera garantiscono una soluzione pratica, versatile ed attenta all'ambiente. I supporti sono infatti realizzati con gomma riciclata SBR che garantisce un'elevata riduzione delle vibrazioni e durata nel tempo. Il fissaggio della motocondensante (o eventuali altre utenze) è garantito dal profilo di alluminio annegato nel supporto stesso. Il supporto viene fornito completo di viteria.

GENERAL DATA


Foot material: SBR recycled rubber
Profile material: aluminium
Profile dimension: 41x23,5 mm
Fixing screw: M10x30 mm
Colour: black




DIMENSIONS AND LOADING CAPACITY

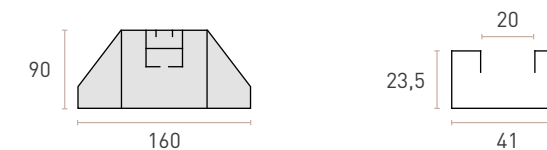

RB 025-04



RB 045-04LC



RB 060-04LC



RB 100-04LC



Code	Dimensions	Length	Load capacity
RB 025-04	160x90 mm	250 mm	160 Kg
RB 045-04LC	160x90 mm	450 mm	180 Kg
RB 060-04LC	160x90 mm	600 mm	200 Kg
RB 100-04LC	160x90 mm	1000 mm	220 Kg

SUMO SM SUPPORTS

DESCRIPTION

Rubber floor supports guarantee a practical versatile and environmentally friendly solution. Supports are made of black SBR recycled rubber which guarantees high vibrations damping and durability. External unit, or other utilities, can be fixed through aluminum channel embedded in the support itself. The support is also provided with provision for ground fixing and is supplied with screws.



I supporti a pavimento in gomma nera garantiscono una soluzione pratica, versatile ed attenta all'ambiente. I supporti sono infatti realizzati con gomma riciclata SBR che garantisce un'elevata riduzione delle vibrazioni e durata nel tempo. Il fissaggio della motocondensante (o eventuali altre utenze) è garantito dal profilo di alluminio annegato nel supporto stesso. Il supporto viene fornito completo di viteria.

GENERAL DATA



Foot material: SBR recycled rubber
Profile material: aluminium
Profile dimension: 21x12 mm/ 41x23,5 mm
Fixing screw: M10x30mm
Colour: black



DIMENSIONS AND LOADING CAPACITY

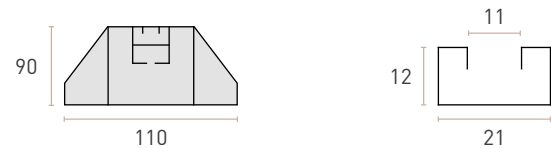

Code	Dimensions	Lenght	Load capacity
RB 045-01SM	110x90 mm	450 mm	180 kg
RB 060-01SM	110x90 mm	600 mm	200 kg

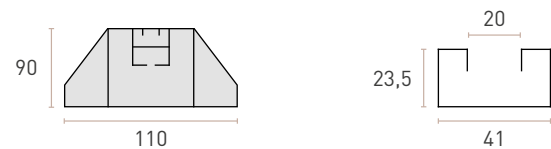

Code	Dimensions	Lenght	Load capacity
RB 045-04SM	110x90 mm	450 mm	180 kg
RB 060-04SM	110x90 mm	600 mm	200 kg

SUMO BLOCK

DESCRIPTION

Rubber floor supports guarantee a practical versatile and environmentally friendly solution. Supports are made of black SBR recycled rubber which guarantees high vibrations damping and durability. External unit, or other utilities, can be fixed through aluminum channel embedded in the support itself. The support is also provided with provision for ground fixing and is supplied with screws.



I supporti a pavimento in gomma nera garantiscono una soluzione pratica, versatile ed attenta all'ambiente. I supporti sono infatti realizzati con gomma riciclata SBR che garantisce un'elevata riduzione delle vibrazioni e durata nel tempo. Il fissaggio della motocondensante (o eventuali altre utenze) è garantito dal profilo di alluminio annegato nel supporto stesso. Il supporto viene fornito completo di viteria.

GENERAL DATA

Foot material: SBR recycled rubber
Colour: black



DIMENSIONS AND LOADING CAPACITY



Code	Dimensions	Lenght	Load capacity
RB 025-S	160x110 mm	250 mm	160 Kg
RB 045-S	160x110 mm	450 mm	260 Kg
RB 060-S	160x110 mm	600 mm	470 Kg
RB 100-S	160x110 mm	1000 mm	630 Kg

NB: SUMO BLOCKS ARE NOT COMPATIBLE WITH SUMO SM SUPPORTS

Rodigas Srl reserves the right to make changes to the products described in the catalogue at any time without notice.
All data presented herein are indicative and not binding.

Rodigas Srl si riserva di apportare variazioni ai prodotti del presente catalogo, in qualsiasi momento, anche senza preavviso.
Tutti i dati qui riportati sono indicativi e non vincolanti.

